

Basic Segment Coupler KFD2-BR-1.PA.1500

- Output: 24 ... 26 V/400 mA
- Couples PROFIBUS PA devices transparently to PROFIBUS DP
- High-power trunk for high device count and long cable lengths
- Installation in Zone 2/Class I, Div. 2
- Up to 1.5 MBit auto-adapting
- PROFIBUS DP terminator selectable
- Power Rail support




Function

The FieldConnex[®] basic Segment Coupler is an all-in-one gateway and fieldbus power supply for connecting PROFIBUS PA to PROFIBUS DP transparently. The power output suits long cable lengths and high device counts. Device couplers provide explosion protection for live work at the spur where needed.

Communication is transparent between DP and PA. The gateway of the Segment Coupler makes each PA device appear as if it was connected to DP: This relates to addressing, cyclic/acyclic data exchange, and the transfer rate. Segment design is clear and easy to understand without subnetworks. The gateway itself is configuration-free. All in all, these features significantly reduce engineering work.

Availability and a long service life are achieved through a passive impedance filter and a design optimized for low heat dissipation. The fieldbus diagnostic handheld (FDH-1) connects directly to test plug sockets located on the plug-in terminal.

Connection

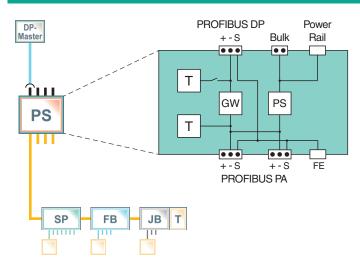

Technical Data

General specifications		
Design / Mounting		Cabinet installation
Supply		
Connection		Power Rail or terminals 11 (L+), 12 (L-)
Rated voltage	Ur	20 30 V DC
Ripple		≤ 10 %
Rated current	l _r	640 mA 365 mA
Power dissipation		max 2.5 W
Fieldbus connection		

1

Technical Data

PROFIBUS PA	
Connection	3+, 6+, 2-, 5-, 1 shield, 4 shield
Rated voltage	24 26 V
Rated current	max. 400 mA
Terminating impedance	100Ω , integrated
PROFIBUS DP	PROFIBUS with RS-485 transmission technology
Connection	terminals 7 RxD/TxD-P, 8 RxD/TxD-N, 9 shield, 10 FE
Baud rate	1.5 MBit/s max.
Indicators/operating means	
Switch	PROFIBUS DP terminator
LED PWB	green: Power on
LED DP/ERB	red 2 Hz flashing: DP error red on: Hardware error red off: DP communication detected
LED PA	red 2 Hz flashing: No PA communication or overload Off: PA communication OK
Galvanic isolation	
PROFIBUS DP/PROFIBUS PA	functional insulation acc. to IEC 62103, rated insulation voltage 50 V AC /70 V DC
PROFIBUS DP/Supply	basic insulation according to IEC/EN 61010, rated insulation voltage 253 V AC /357 V DC
PROFIBUS PA/Supply	basic insulation according to IEC/EN 61010, rated insulation voltage 253 V AC /357 V DC
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013
Standard conformity	
Electromagnetic compatibility	NAMUR NE 21
Degree of protection	IEC/EN 60529
Fieldbus standard	EN 50170/2
Climatic conditions	DIN IEC 721
Shock resistance	EN 60068-2-27
Vibration resistance	EN 60068-2-6
Ambient conditions	
Ambient temperature	-40 60 °C (-40 140 °F)
Storage temperature	-40 85 °C (-40 185 °F)
Relative humidity	< 95 % non-condensing
Shock resistance	15 g 11 ms
Vibration resistance	1 g 10 150 Hz
Pollution degree	max. 2, according to IEC 60664
Corrosion resistance	acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications	
Connection type	Terminals
Core cross section	up to 2.5 mm ²
Housing material	Polycarbonate
Degree of protection	IP20
Mass	180 g
Mounting	DIN rail mounting
Data for application in connection with hazardo	bus areas
Certificate	TÜV 16 ATEX 7831 X
Marking	ll 3G Ex ec IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN IEC 60079-0:2018+AC:2020, EN 60079-7:2015+A1:2018
International approvals	
CSA approval	CSA 16.70064204
Approved for	Class I, Division 2, Groups A, B, C, D Class I, Zone 2, Ex nA IIC T4 Gc
IECEx approval	IECEx TUR 16.0006X

Release date: 2023-06-21 Date of issue: 2023-06-21 Filename: 277830_eng.pdf

Technical Data

Approved for

General information

Supplementary information

Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com.

Assembly



Ex ec IIC T4 Gc

Accessories


UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
KFD2-EB2	Power Feed Module
KFD2-EB2.R4A.B	Power feed module, redundant supply

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

3

Additional Information

Dimensions and Assembly

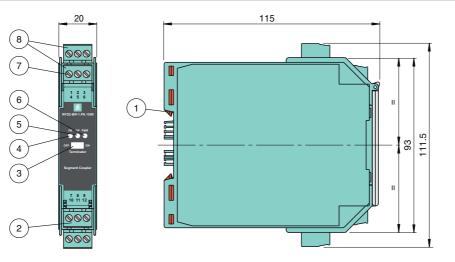

Description:

- 1 Extendable lugs
- 2 PROFIBUS DP connection
- 3 Switch: Terminator for PROFIBUS DP
- 4 LED PA: Status of PROFIBUS PA
- 5 LED DP: Status of PROFIBUS DP and hardware
- 6 LED PWR: Status of power supply
- 7 Removable terminal with test plug sockets
- 8 PROFIBUS PA trunk connections

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

