

Printview: 2-conductor terminal strip; with push-buttons on both sides; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail; 6-pole - Item No.: 261-106/341-000



**2-conductor terminal strip; with push-buttons on both sides; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail; 6-pole**

Item No.: 261-106/341-000



2-conductor terminal strip; with push-buttons on both sides; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail; 6-pole

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	261-106/341-000
GTIN / EAN	4044918618762
Content	1
Order amount	25
Customer item number	

## Notes

## Technical data

### Miscellaneous



Packaging type	BOX
Rated voltage (III / 3) [V]	500 [V]
Rated impulse voltage (III / 3) [kV]	6 [kV]
Rated current [A]	24 [A]

Printview: 2-conductor terminal strip; with push-buttons on both sides; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail; 6-pole - Item No.: 261-106/341-000

Technical data	
Legend (ratings)	(III / 3) Overvoltage category III / Pollution degree 3
Type of wiring	Side-entry wiring
No. of poles	6
Total number of connection points	12
Total number of potentials	6
Number of levels	1
Connection technology	CAGE CLAMP®
Number of connection points (connection type)	2
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 Inch
Width	50.5 mm / 1.988 Inch
Height from the surface	23.2 mm / 0.913 Inch
Depth	28 mm / 1.102 Inch
Design	horizontal
Mounting type	Mounting flange
Marking level	Side marking
Color	gray
Fire load [MJ]	0.339 [MJ]
Weight [g]	16.84 [g]

Printview: 2-conductor terminal strip; with push-buttons on both sides; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail; 6-pole - Item No.: 261-106/341-000

## Images & drawings

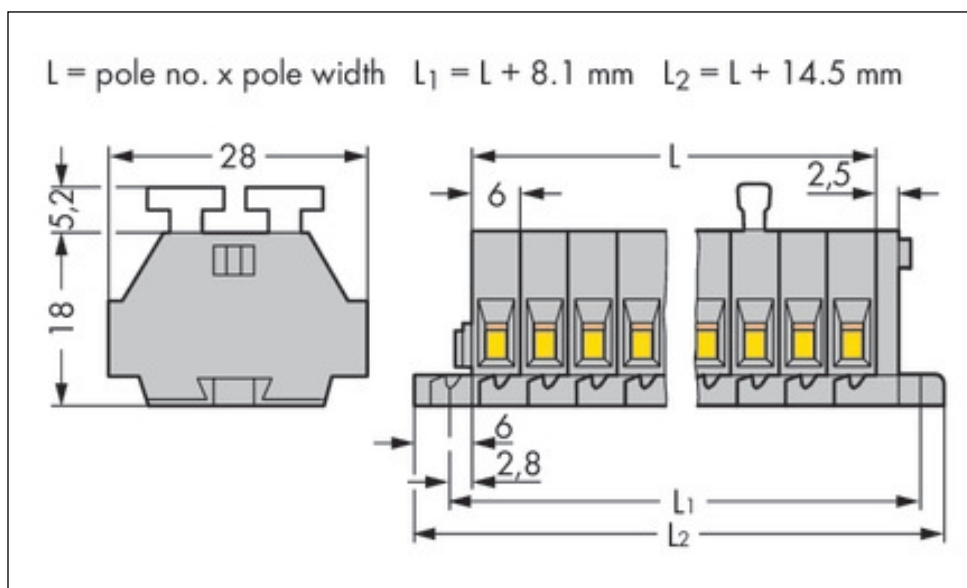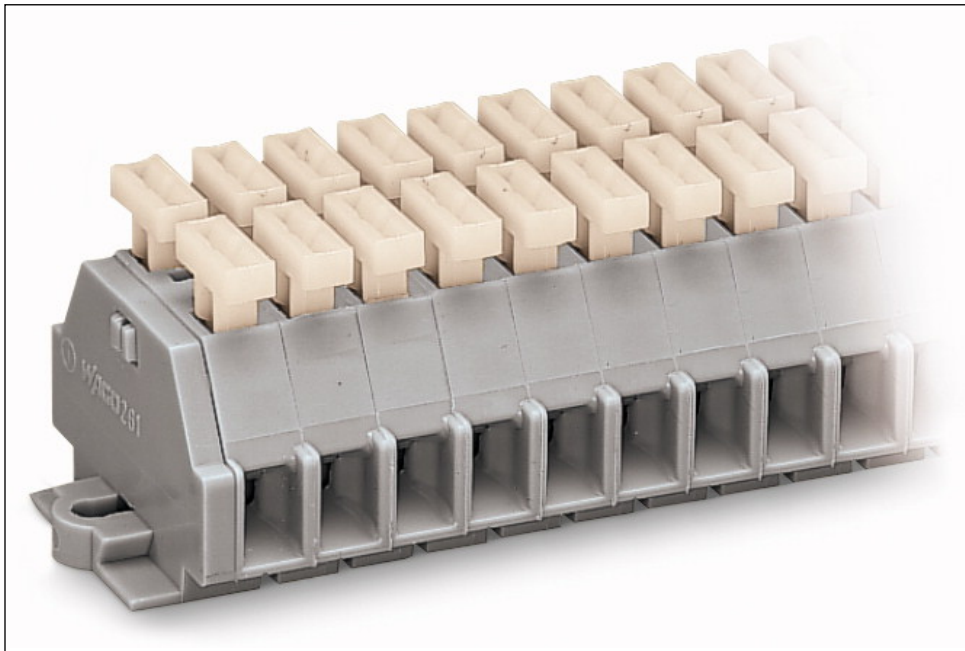

Printview: 2-conductor terminal strip; with push-buttons on both sides; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail; 6-pole - Item No.: 261-106/341-000

---

#### **Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.