



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .5 – 2.5 mm<sup>2</sup>

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

## Features

### Product Type Features

Insertion Force	Normal
-----------------	--------

### Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

### Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

### Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

### Dimensions

Terminal Material Thickness	.33 mm[.013 in]
Product Length	19.2 mm[.755 in]
Compatible Insulation Diameter Range	2.16 – 3.43 mm[.085 – .135 in]
Wire Size	.5 – 2.5 mm <sup>2</sup>

### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

### Industry Standards

Compatible With Agency/Standards Products	UL
---	----

### Packaging Features

Packaging Quantity	6000
Packaging Method	Strip/Reel

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1742754-1  
FASTON RECEPTACLE 26-22 AWG  
TPBR



TE Part # 170304-1  
250 FASTON,REC.,22-18 AWG,BR



TE Part # 170304-2  
250 FASTON,REC.,22-18 AWG,BR



TE Part # 2150034-1  
OCEAN\_2.0\_APPLICATOR-E-110F180F



**KIT**  
REPRESENTATION ONLY

TE Part # 7-2150034-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-110F180F



TE Part # 724659-2  
EXT TOOL FOR POSITIVE .250



TE Part # 2150034-2  
OCEAN\_2.0\_APPLICATOR-E-110F180FA




TE Part # 7-2150034-1  
OCEAN\_2.0\_APPLICATOR-E-110F180F




TE Part # 7-2150034-2  
OCEAN\_2.0\_APPLICATOR-E-110F180FA




TE Part # CAT-M9194-CH8172  
MULTILOCK, CONNECTOR HOUSING

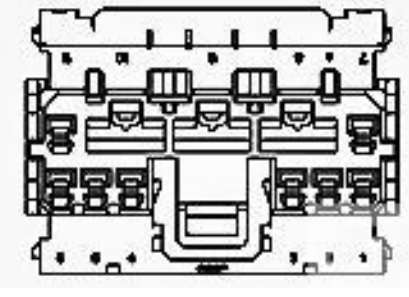


TE Part # 174925-4  
070 MLC W-W PLUG HSG 11P GREEN

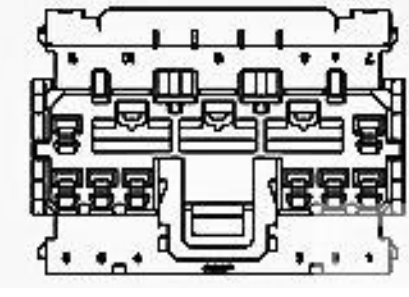


TE Part # 174925-5  
070 MLC W-W PLUG HSG 11P BLUE

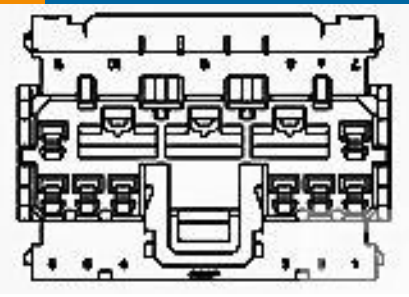

TE Part # 174926-5  
070 MLC W-W PLUG HSG 13P BLUE

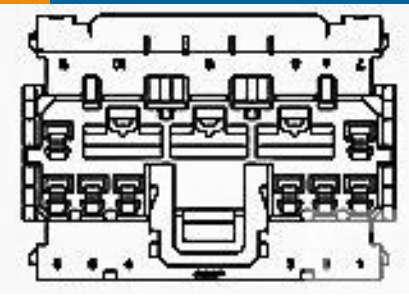

TE Part # 174927-4  
070 MLC W-W PLUG HSG 15P GREEN

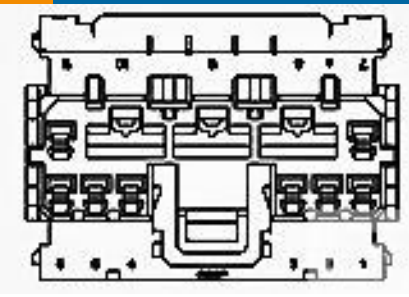

TE Part # 174925-2  
HOUSING,PLUG,11 POSITION, .070


## Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(140)

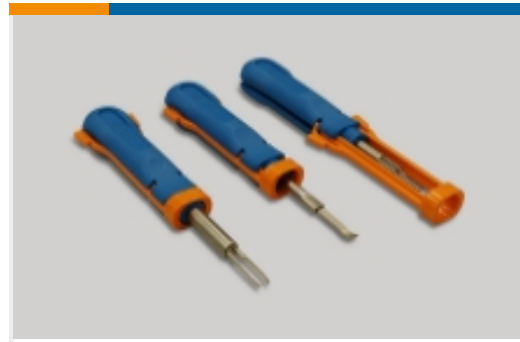


Insertion & Extraction Tools(6)



Magnet Wire Terminals(1)



PCB Terminals(135)

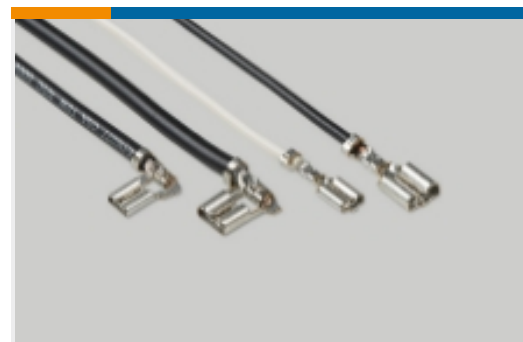

Quick Disconnects(442)



Splices(4)


## Customers Also Bought



TE Part #1376395-1  
5MM POWER KEY D/L PLATE GREEN




TE Part #2-172132-1  
FF 250 PLUG HSG 3P NYLON NAT

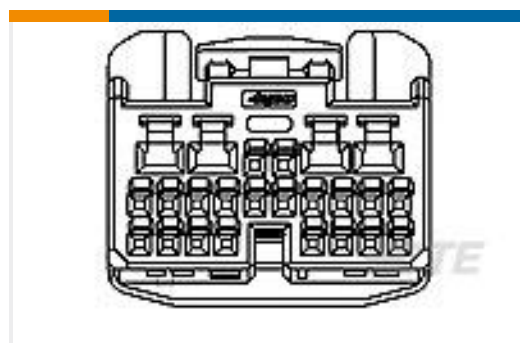

TE Part #1746864-2  
0.64III/2.3II 24POS PLUG ASSY



TE Part #1743424-1  
2.8MM MCP-E N-SLD TAB(M) CONT

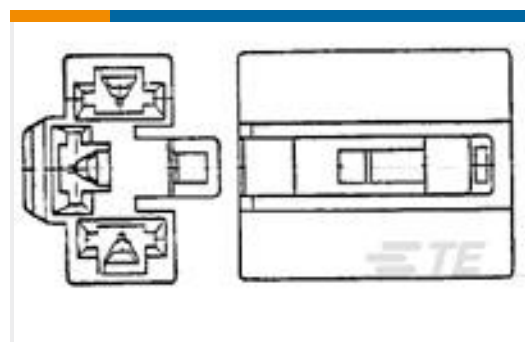

TE Part #176774-5  
FF 250 PLUG HSG 3P NYLON NAT



TE Part #1-1762942-6  
WIRE CRIMPER, END FEED



TE Part #2415556-2  
7POS,TH 025,REC HSG,UNSLD

## Documents

### Product Drawings

[250 FASTON,REC.,20-14 AWG,TPBR](#)

English

### CAD Files

[3D PDF](#)

[3D](#)



**Customer View Model**

[ENG\\_CVM\\_CVM\\_170032-5\\_AS\\_c-170032-5-as.2d\\_dxf.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_170032-5\\_AS\\_c-170032-5-as.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_170032-5\\_AS\\_c-170032-5-as.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Product Specifications**

[Crimping of 250 Series Tab and Receptacle Contacts](#)

Japanese

[Application Specification](#)

Japanese

[Application Specification](#)

Japanese

[Crimping of 250 Series Tab and Receptacle Contacts](#)

Japanese

---

**Instruction Sheets**

[Customer Manual \(non U.S.\)](#)

Japanese

["250" Series, Housing Lance Connector](#)

Japanese