

120W, 9 to 36V Input Industrial Isolated Quarter Brick DC-DC Converter

<https://product.tdk.com/en/power/gqa>
www.emea.lambda.tdk.com/gqa



Industrial



COTS



Test



Robotics

The GQA series of isolated DC-DC converters deliver 120W in a compact and high performance quarter brick footprint. It operates from an input range of 9 to 36V and comes with a broad selection of output voltages. The mechanical packaging is available in multiple baseplate, enclosed and potted configurations, supporting convection and conduction cooling via external cold plate or heatsink. It's designed to deliver high useable power at elevated temperatures and withstand high shock and vibration exposure in rugged industrial and battery powered autonomous mobility applications.

Features	Benefits
• 120W in an Industry Quarter Brick Footprint	• High Power Density, Less Board Area Needed
• 9 to 36V Input Range	• Can Operate From Different Input DC Sources Including Battery
• Flanged and Non-Flanged Baseplate Design	• Conduction Cooling Mounting Flexibility for Cold Plate or Heatsink
• Maximum Baseplate Temperature of 105°C	• High Useable Power at Elevated Temperatures
• Enclosed and Potted Options	• Operation in Harsh Environment With High Shock and Vibration Exposure

Model Selector (Full Systems)								
Model	Input Voltage (V)	Output Voltage (V)	Max Current (A)	Max Power (W)	Remote Sense	Baseplate	Enclosed with Potting	Input to Output Isolation
GQA2W024A050V-007-R	9 - 36	5	24	120	Yes	Flanged	No	1500 Vdc
GQA2W024A050V-0P7-R	9 - 36	5	24	120	Yes	Flanged	Yes	3000 Vdc
GQA2W024A050V-N07-R	9 - 36	5	24	120	Yes	Non-Flanged	No	1500 Vdc
GQA2W024A050V-NP7-R	9 - 36	5	24	120	Yes	Non-Flanged	Yes	2250 Vdc
GQA2W010A120V-007-R	9 - 36	12	10	120	Yes	Flanged	No	1500 Vdc
GQA2W010A120V-0P7-R	9 - 36	12	10	120	Yes	Flanged	Yes	3000 Vdc
GQA2W010A120V-N07-R	9 - 36	12	10	120	Yes	Non-Flanged	No	1500 Vdc
GQA2W008A150V-007-R	9 - 36	15	8	120	Yes	Flanged	No	1500 Vdc
GQA2W008A150V-0P7-R	9 - 36	15	8	120	Yes	Flanged	Yes	3000 Vdc
GQA2W008A150V-N07-R	9 - 36	15	8	120	Yes	Non-Flanged	No	1500 Vdc
GQA2W005A240V-007-R	9 - 36	24	5	120	NA	Flanged	No	1500 Vdc
GQA2W005A240V-0P7-R	9 - 36	24	5	120	NA	Flanged	Yes	3000 Vdc
GQA2W005A240V-N07-R	9 - 36	24	5	120	NA	Non-Flanged	No	1500 Vdc
GQA2W005A240V-NP7-R	9 - 36	24	5	120	NA	Non-Flanged	Yes	2250 Vdc
GQA2W004A280V-007-R	9 - 36	28	4.28	120	NA	Flanged	No	1500 Vdc
GQA2W004A280V-0P7-R	9 - 36	28	4.28	120	NA	Flanged	Yes	3000 Vdc
GQA2W004A280V-N07-R	9 - 36	28	4.28	120	NA	Non-Flanged	No	1500 Vdc
GQA2W004A280V-NP7-R	9 - 36	28	4.28	120	NA	Non-Flanged	Yes	2250 Vdc
GQA24003A480V-007-R	18 - 36	48	2.5	120	NA	Flanged	No	1500 Vdc
GQA24003A480V-0P7-R	18 - 36	48	2.5	120	NA	Flanged	Yes	3000 Vdc
GQA24003A480V-N07-R	18 - 36	48	2.5	120	NA	Non-Flanged	No	1500 Vdc

GQA	2W	005A	240V	-	007	-	R
	Input Voltage 2W: 9 - 36V 24: 18 - 36V	Output Current 005A: 5A 010A: 10A	Output Voltage: 240V : 24V 050V : 5V		Baseplate Construction: 007 : Flanged Baseplate 0P7 : Flanged Baseplate, Enclosed / Potted, 3kV Isolation N07: Non-Flanged Baseplate NP7: Non-Flanged Baseplate, Enclosed / Potted		R : RoHS Compliant


Related Products		
Type	Part Number	Description
Isolated DC-DC Converter	HQA120	120W MIL-COTS, Input 9-40V, Isolated Quarter Brick with M-Grade screening available
Isolated DC-DC Converter	HQA85	85W MIL-COTS, Input 9-40V, Isolated Quarter brick
Input Filter	FQA	40V / 20A MIL-COTS Filter for MIL-STD-461
Input Filter	FQB	40V / 20A MIL-COTS Filter for MIL-STD-461; MIL-STD-1275; MIL-STD-704; DO-160G
Evaluation Board	FQX-HQA-EVK-D0	Evaluation board (no modules) that fits 2X HQA or GQA DC-DC converters and FQx input filters

Specifications								
Model		5	12	15	24	28	48	
Input								
Input Voltage Range	Vdc	9 - 36					18 - 36	
Input Transient (t < 1s)	Vdc	50						
Input Current (max)	A	17					10	
Turn-ON Input Voltage	Vdc	9.5					17	
Turn-OFF Input Voltage	Vdc	8.5					15.5	
Efficiency (typical)	%	90	89	89	87	89	91.5	
Safety Certifications and Markings	-	IEC/UL/CSA/EN 62368-1, 60950-1, CE Mark and UKCA Mark						
Output								
Output Voltage Tolerance	%	±4 (Rated input, Load and Temperature)						
Output Voltage Adjustment Range	Vdc	4.5 - 5.5	10.8 - 13.2	13.5 - 16.5	21.6 - 26.4	25.2 - 30.8	45.6 - 52.8	
Line Regulation	%	0.05						
Load Regulation	%	0.03						
External Load Capacitance	µF	47 - 2400	0 - 1800	0 - 1500	0 - 1000	0 - 1000	0 - 1000	
Ripple & Noise (typ)	mVpp	40	40	80	100	100	125	
Switching Frequency	kHz	270						
Overcurrent Protection Threshold (typ)	A	37	14.5	12	6.2	5.1	4	
Over Voltage Protection (typ)	Vdc	6.5	15	18	32	35	54	
Over Temperature Protection	-	Shutdown - Autorecovery						
Environmental								
Operating Temperature (Tc)	°C	-40 to 105						
Storage Temperature	°C	-55 to 125						
Humidity (non condensing)	%RH	10 - 95						
Cooling	-	Conduction Cooling						
Isolation Voltage (Input to Output)	Vdc	007-R / N07-R : 1500 0P7-R : 3000 NP7-R : 2250						
Isolation Voltage (Baseplate to Input or Output)	Vdc	007-R / N07-R : 1500 0P7-R / NP7-R : 2250						
Isolation Resistance	MΩ	> 10						
Shock	-	MIL-STD 810G, Method 516.6, Procedure I, VI						
Vibration	-	MIL-STD-810G, Method 514.6, Procedure I, Category 14						
Other								
Weight (max)	g	85						
Size (LxWxH)	mm	Flanged Baseplate : 60.6 x 49.5 x 12.7 Non Flanged Baseplate: 60.6 x 39.5 x 12.7						
Size (LxWxH)	Inches	Flanged Baseplate : 2.39 x 1.95 x 0.5 Non Flanged Baseplate: 2.39 x 1.56 x 0.5						
MTBF - Telcordia SR-332	-	> 4 Mhrs; 100% Load; Ta = 40 °C						
Warranty	yrs	3						


Notes
See website for detailed product [specifications](#).

Mechanical Specification:

-007-R Suffix / Flanged Baseplate

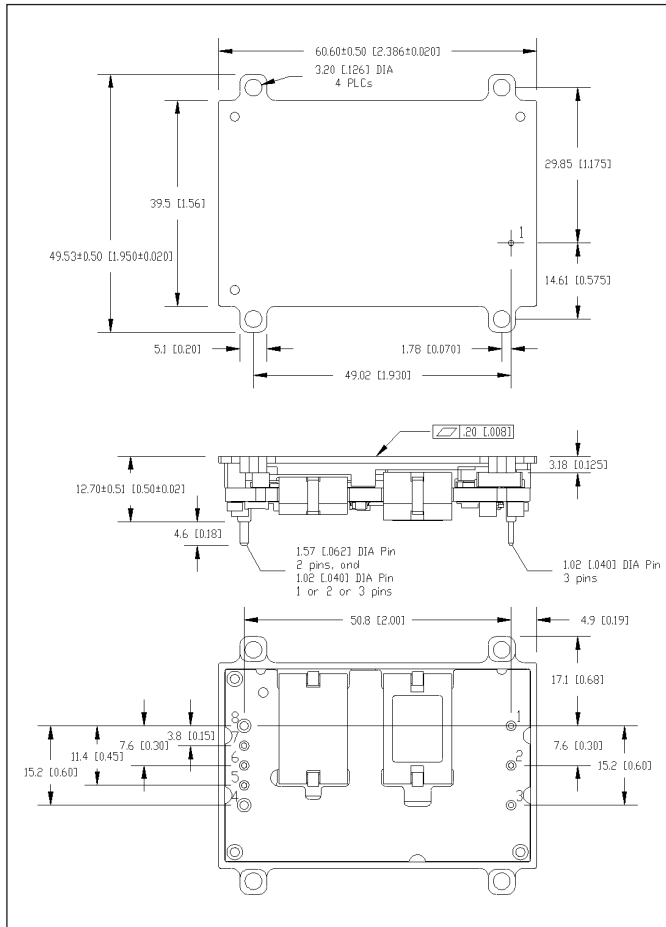

-N07-R Suffix / Non-Flanged Baseplate

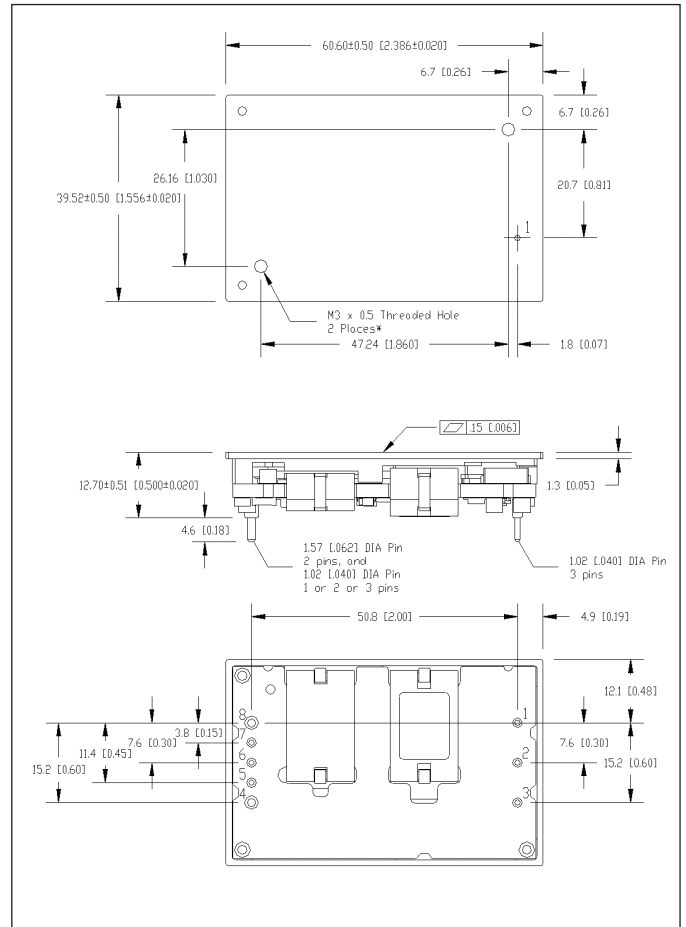

Note: Dimensions are in mm [in].

Unless otherwise specified, tolerances are x.x [x.xx] ±0.5 [0.02], x.xx [x.xxx] ±0.25 [0.010]

For Non-Flanged Baseplates, the depth of M3 mounting screws cannot exceed 3.0mm [0.12"].


Pinout

Pin	Function	Pin	Function
1	Vin(+)	5	sense (-), select models
2	On/Off	6	Trim
3	Vin(-)	7	Sense (+), select models
4	Vo(-)	8	Vo(+)


Pin base material is tellurium copper with tin over nickel plating.

Mechanical Specification:

-0P7-R Suffix / Flanged Baseplate, Enclosed /Potted

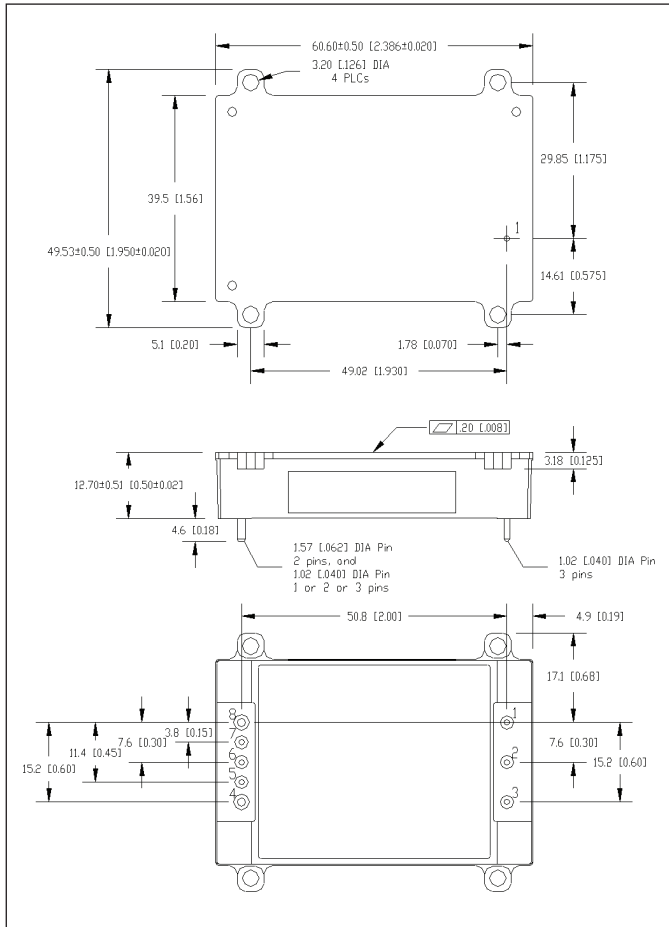

-NP7-R Suffix / Non-Flanged Baseplate, Enclosed/Potted

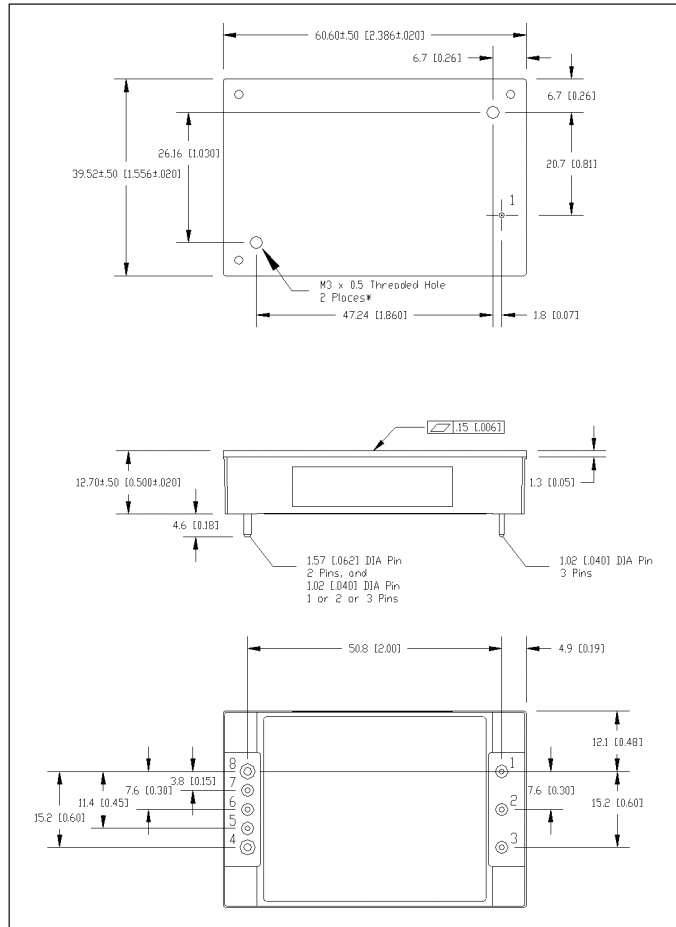


Note: Dimensions are in mm [in].

Unless otherwise specified, tolerances are x.x [x.xx] ±0.5 [0.02], x.xx [x.xxx] ±0.25 [0.010]


For Non-Flanged Baseplates, the depth of M3 mounting screws cannot exceed 3.0mm [0.12"].

Recommended Hole Pattern:

(Pin Side Down – Flanged Baseplate)

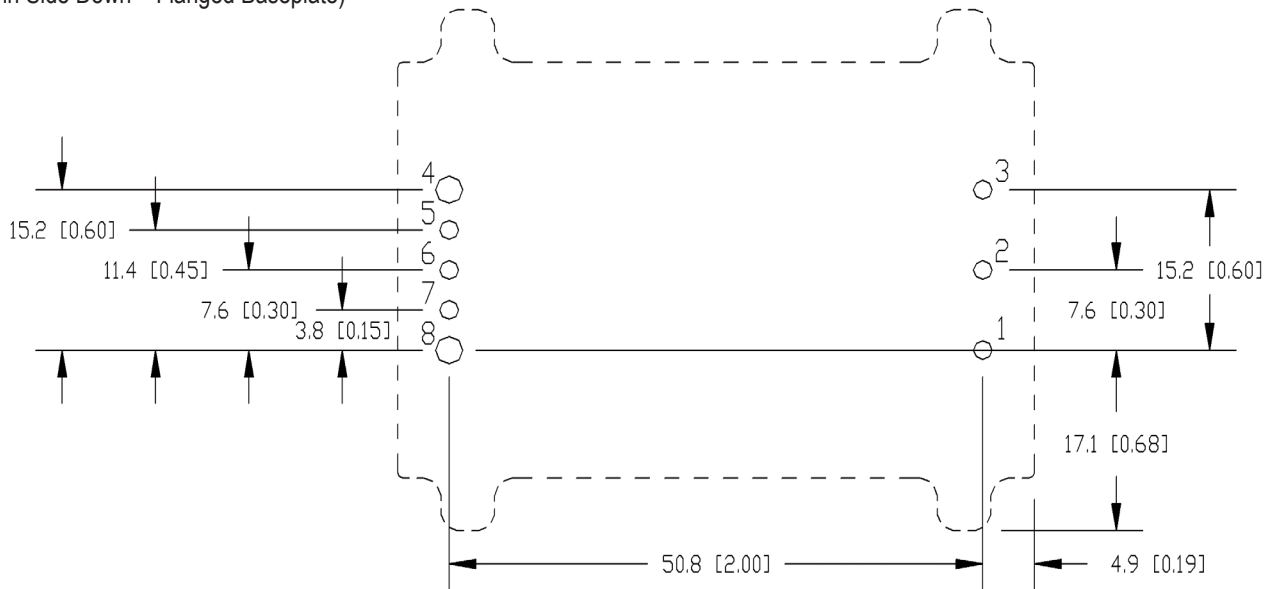

(Pin Side Down – Non-Flanged Baseplate)

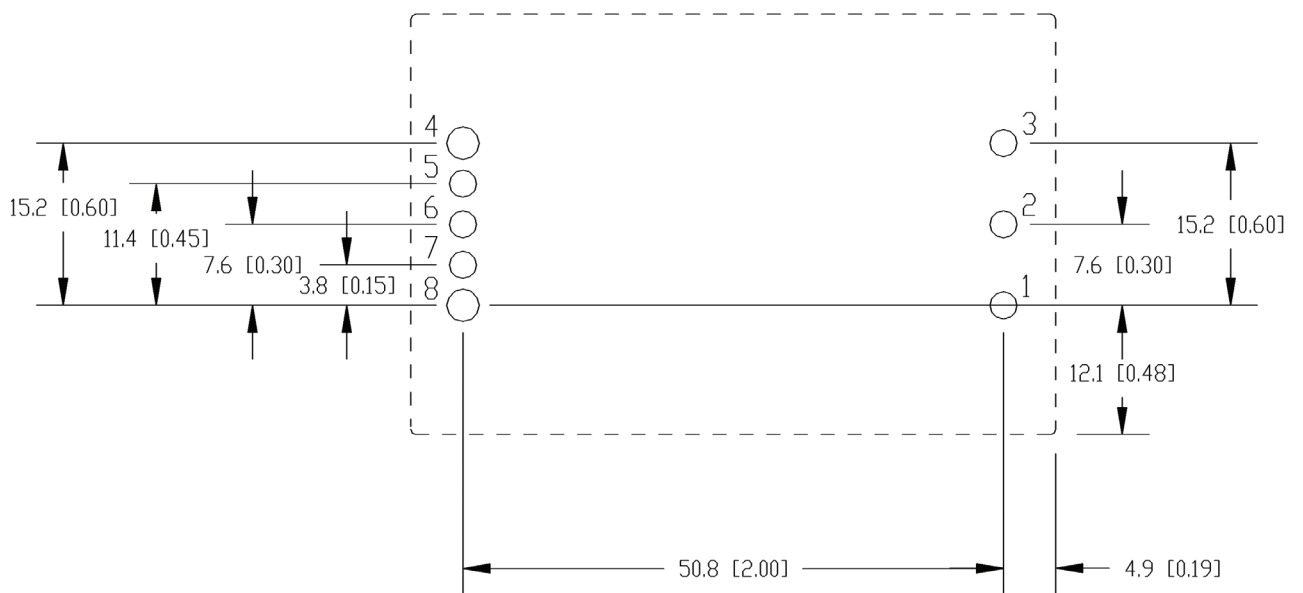



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
france@fr.tdk-lambda.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
info.italia@it.tdk-lambda.com
www.emea.lambda.tdk.com/it



Netherlands

info@nl.tdk-lambda.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
info@de.tdk-lambda.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
info@at.tdk-lambda.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
info@ch.tdk-lambda.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
info@dk.tdk-lambda.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
info@uk.tdk-lambda.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
info@tdk-lambda.co.il
www.emea.lambda.tdk.com/il



C.I.S.

Commercial Support:

Tel: +7 (495) 665 2627

Technical Support:

Tel: +7 (812) 658 0463

info@tdk-lambda.ru

www.emea.lambda.tdk.com/ru



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
powersolutions@us.tdk-lambda.com
www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
powersolutions@cn.tdk-lambda.com
www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tls.mkt@sg.tdk-lambda.com
www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@in.tdk-lambda.com
www.sg.lambda.tdk.com

For Additional Information, please visit
<https://product.tdk.com/en/power/>

