

Data sheet

236-714

**MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE
1 POLE PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY**



Technical data

Package size 600 6*100 pieces.

Pin spacing from	5 mm
Pin spacing up to	5.08 mm
Pin spacing from	0.197 in
Pin spacing up to	0.2 in
pole count	1
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Voltage CSA	300 V
Current UL	15 A
Current CSA	15 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	16 A
Measured voltage EN	500 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	16 A
Weight	0.844 g
Color	blue

Data sheet**236-714****MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE
1 POLE PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY**

Wiring type	Front-/Side-entry
No. of connection Points	1
No. of potentials	1
Height	13 mm
Height	0.512 in
Width	5 mm
Width	0.197 in
Depth	14 mm
Depth	0.551 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

xxx-xxx/332-000

with 2 solder pins/pole and 5,5 mm long solder pins

Data sheet

236-714

**MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE
1 POLE PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY**

Approval	Voltage	Current	Approval number	Notes
BBJ	250	16	B/12/697/03	
BV	500/250	16	11915/A0	
CCA	250	16	DK2082	
CSA	300	15	18677-10	
CSM	250	16	017956	
DEMKO	250	16	98-04355	
DNV	250	16	E6998	
GL	500/250	16	17296-00HH	
KEMA	380	16	83.6970.01/02	
RMR	250	16	99.00007.250	
RosTesT	250	16	B09523	
SEMKO	400		9411003	
UL	300	15	E45172	

Data sheet

236-714

MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE 1 POLE PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY

Accessories


Item number

END PLATE 1 MM / 0.039 IN THICK	236-400
Jumper GDS RM 5mm	Jumper PCB Spacing 5mm
Jumper GDS RM 7,5mm	Jumper PCB Spacing 7.5mm
OPERATING STICKER FOR PCB TERMINAL BLOCKS	210-191
OPERATING TOOL FITTED FOR SERIES 264, 280, 281	209-130
OPERATING TOOL PLASTICS	236-332
Profile PCB 236, 255, 256	Profile PCB 236, 255, 256
Profile PCB 257, 736, 737, 738	Profile PCB 257, 736, 737, 738
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-161
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-162
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-163
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-164
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-160/237-106
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-166
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-167
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-168
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-169
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-165/237-126

Data sheet

236-714

MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE
1 POLE PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY

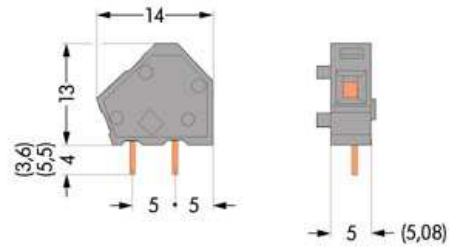

Data sheet

236-714

**MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE
1 POLE PIN SPACING 5/5.08 MM / 0.2 IN FRONT-/SIDE-ENTRY**

Diameter of drilled hole: $1,1^{+0,1}$ mm