


Item no.: 769-112
 Product description: 1-conductor female plug straight for insertion into carrier terminal blocks or male connectors codable can be commoned with miniature adjacent jumpers 12-pole

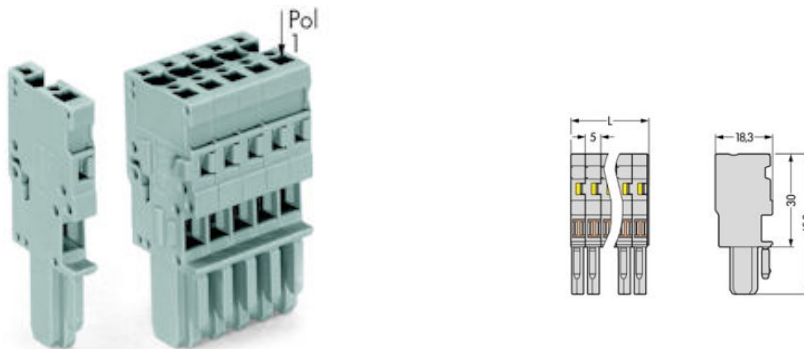

Produkt kann von Bild abweichen / product may differ

Packing unit 20 pieces

RoHS compliant

Product group	18 (X-COM-SYSTEM)
pole count	12
Cross section [mm ²]	0.08 - 4 mm ²
Cross section [AWG]	28 - 12 AWG
Connection method	CAGE CLAMP®CONNECTION
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	32 A
Weight	38.776 g
Color	grey
Wiring type	Front-entry
No. of connection Points	12
No. of potentials	12
Height	45.2 mm
Height	1.78 in
Width	60 mm
Width	2.362 in

Depth	18.3 mm
Depth	0.72 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in



Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
769-112	ABS	05-HG476175/3-PDA	500	32	4
769-112	CSA	154112-1101144	300	20	28-12
769-112	KEMA	2077750.01	500	32	4
769-112	UR	E45171	600	20	16-12
769-112	UR	E45172	300	20	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected