


Data sheet Product LA V 34 100 24




Cooling aggregates>Cooling aggregates with axial fan
80 x 83 mm, with axial fan and air-flow chamber

Features

width:	80 mm
height:	83 mm
length:	100 mm
thermal resistance:	0.193 - 0.11 K/W
surface:	- aluminium natural/degreased/cutting edges not deburred (by the metre not degreased/cutting edges not deburred) - mounting area(s) milled flat

Technical Drawing

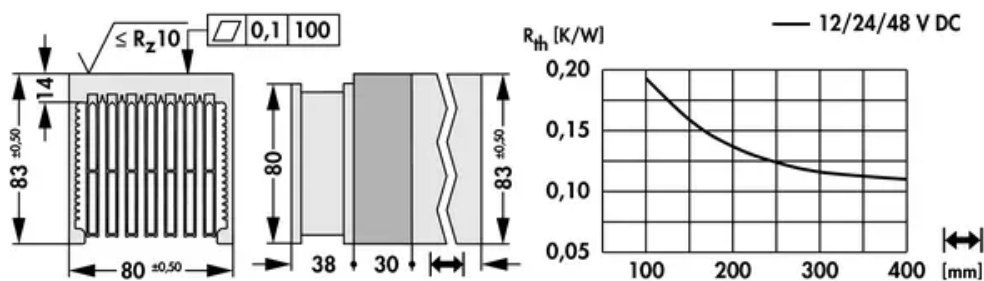

Fan

type:	ebmpapst 8212 JH4
dimensions:	80x80x38 mm
tension:	12 V DC
power inout:	39 W

max. air volume:	222 m³/h
temperature range:	-20°C... +70°C
noise level:	71 dB(A)
speed:	14,000 min⁻¹
weight:	200 g
failure rate (L ₁₀):	L₁₀ > 50,000 h (40°C)
type:	ebmpapst 8214 JH4
dimensions:	80x80x38 mm
tension:	24 V DC
power inout:	38 W
max. air volume:	222 m³/h
temperature range:	-20°C... +70°C
noise level:	71 dB(A)
speed:	14,000 min⁻¹
weight:	200 g
failure rate (L ₁₀):	L₁₀ > 50,000 h (40°C)
type:	ebmpapst 8218 JH4
dimensions:	80x80x38 mm
tension:	48 V DC
power inout:	36 W
max. air volume:	222 m³/h
temperature range:	-20°C... +70°C
noise level:	71 dB(A)
speed:	14,000 min⁻¹
weight:	200 g
failure rate (L ₁₀):	L₁₀ > 50,000 h (40°C)

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de