



## Data sheet | Item number: 221-500/000-006

Mounting carrier; 221 Series - 4 mm<sup>2</sup>; for DIN-35 rail mounting/screw mounting; blue

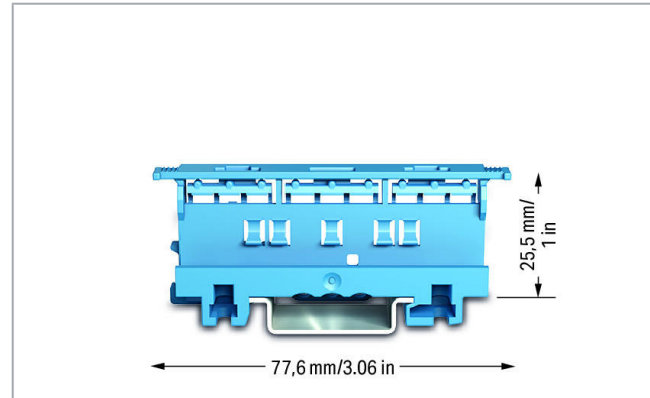

[www.wago.com/221-500/000-006](http://www.wago.com/221-500/000-006)

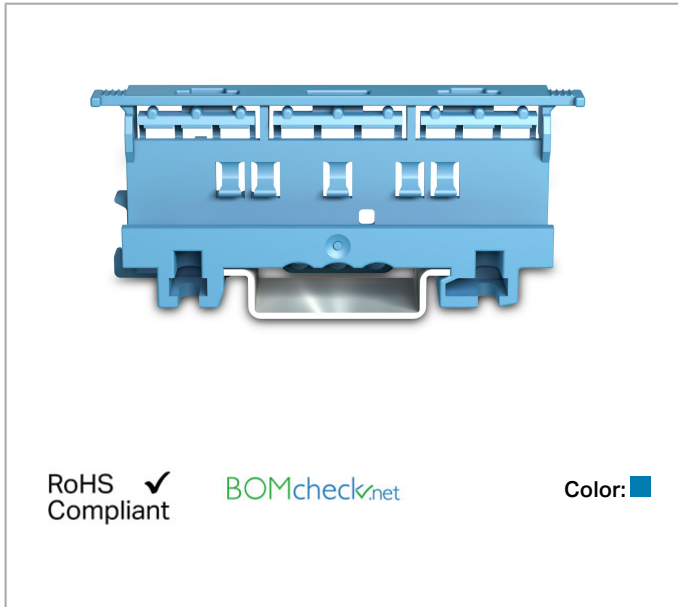

RoHS  
Compliant ✓

BOMcheck.net

Color: ■

### Data

#### Physical data

Width	17.5 mm / 0.689 inch
Height	77.6 mm / 3.055 inch

#### Mechanical data

Mounting type	DIN-35 rail Screw mount
Suitable	for 2-, 3- and 5-conductor 221 Series Splicing Connectors (4 mm <sup>2</sup> )

#### Material data

Color	blue
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Weight	9.6 g

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Commercial data

Packaging type	BOX
Country of origin	CN
GTIN	4055143833547
Customs tariff number	39269097900

## Compatible products

### Mounting adapter



**Item no.: 222-505**

Strain relief plate; for mounting carrier; 221 or 222 Series, can be snapped

[www.wago.com/222-505](http://www.wago.com/222-505)



**Item no.: 222-510**

Angled DIN-rail adapter; in combination with mounting carrier; 221-500 or 222-500; for DIN-35 rail mounting; gray

[www.wago.com/222-510](http://www.wago.com/222-510)

### Marking accessories



**Item no.: 210-833**

Marking strips; on reel; 6 mm wide; plain; Self-adhesive; white

[www.wago.com/210-833](http://www.wago.com/210-833)

## Downloads

### Documentation

#### Additional Information

Technical explanations	3. 4. 2019	pdf 2.2 MB	Download
------------------------	------------	---------------	----------

## CAD/CAE-Data

### CAD data

2D/3D Models 221-500/000-006	URL	Download
------------------------------	-----	----------

### CAE data

ZUKEN Portal 221-500/000-006	URL	Download
------------------------------	-----	----------

## Environmental Product Compliance

### Compliance Search


Environmental Product Compliance 221-500/000-006	URL	Download
--------------------------------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!


Mounting carrier; 221 Series - 4 mm<sup>2</sup>; for DIN-35 rail mounting/screw mounting; blue

## Installation Notes

### Conductor termination

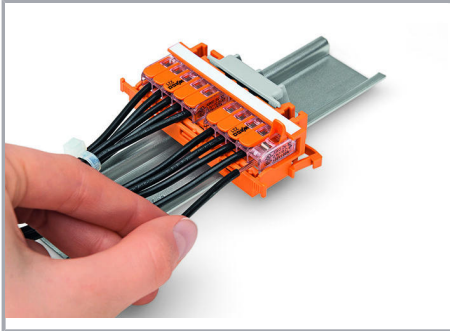


CAGE CLAMP® connection:

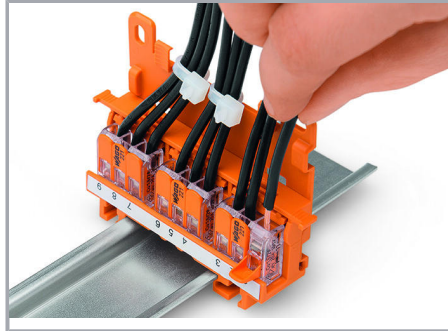


Removing a conductor.


Conductor termination with connectors fitted in a mounting carrier

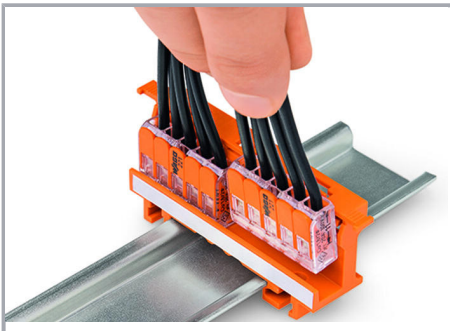

Inserting a connector into the mounting carrier.

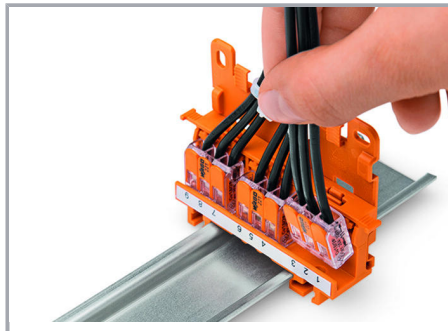


Inserting a connector into the mounting carrier.

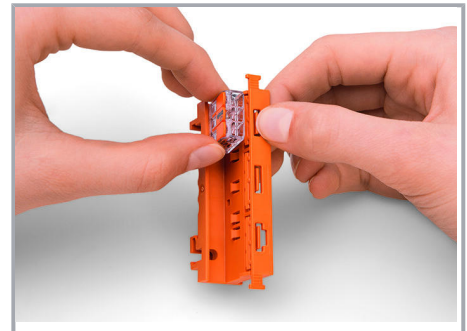


Removing a connector from the mounting carrier.


Subject to changes. Please also observe the further product documentation!

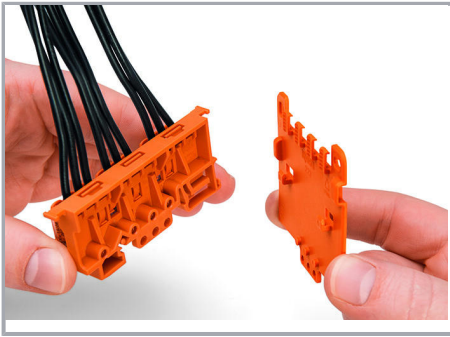


Securing a strain relief plate (222-505) to the mounting carrier.

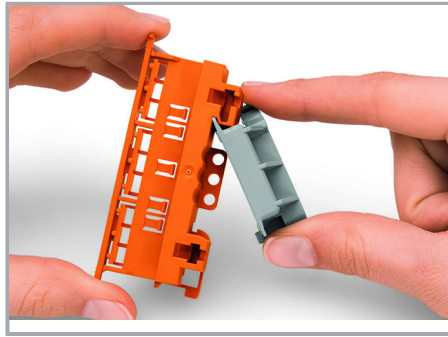


Snapping the angled DIN-rail adapter (222-510) onto the mounting carrier.

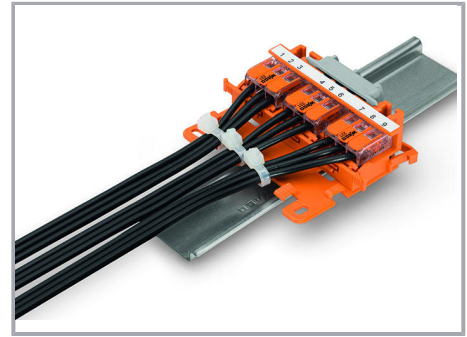

Horizontal mounting on DIN-35 rail using an angled DIN-rail adapter

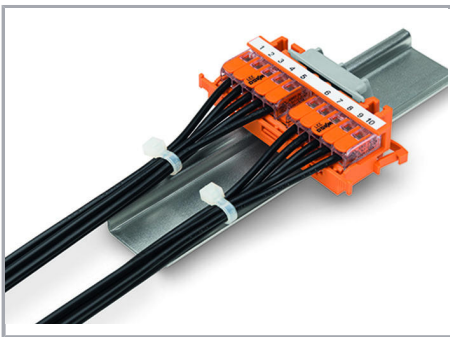

Horizontal mounting on DIN-35 rail using an angled DIN-rail adapter

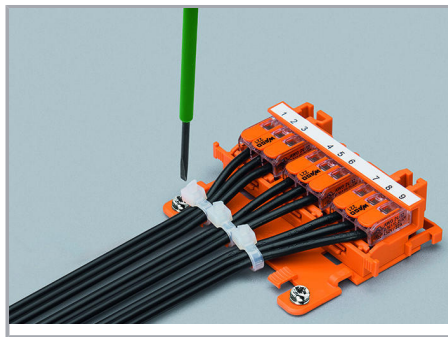


Horizontal screw mounting with strain relief plate on a flat surface




Vertical mounting with strain relief plate on DIN-35 rail


Subject to changes. Please also observe the further product documentation!

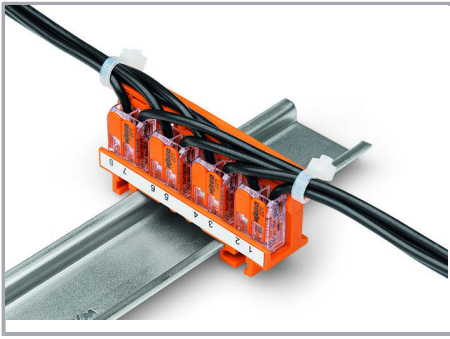

Strain relief via cable ties on the mounting carrier (transverse to the connectors' wiring direction) – clamping units labeled via marking strips (210-334)

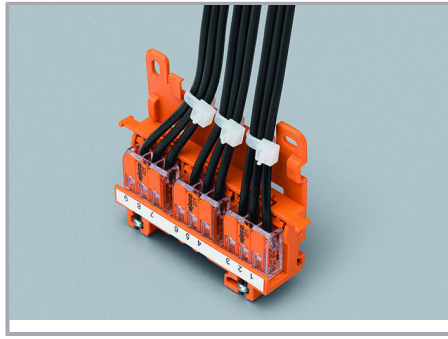

Vertical screw mounting with strain relief plate on a flat surface

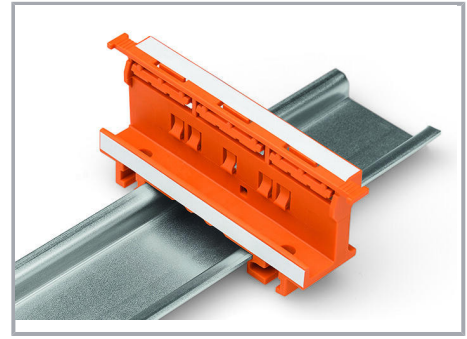

Mounting carrier on a DIN-35 rail


### Testing



Testing connectors via test slots on top of the carrier.

### Ex application

Subject to changes. Please also observe the further product documentation!

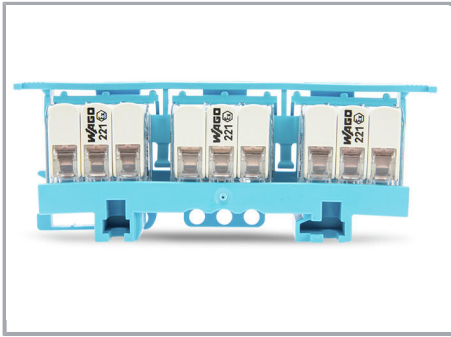

Carriers with a blue insulated housing are suitable for Ex i applications. Both clearances and creepage distances for the protection type "intrinsic safety Ex i" must be observed.

Subject to changes. Please also observe the further product documentation!