



Pushing Performance
Since 1945

Han Megabit Modul for PCB, GND, Female

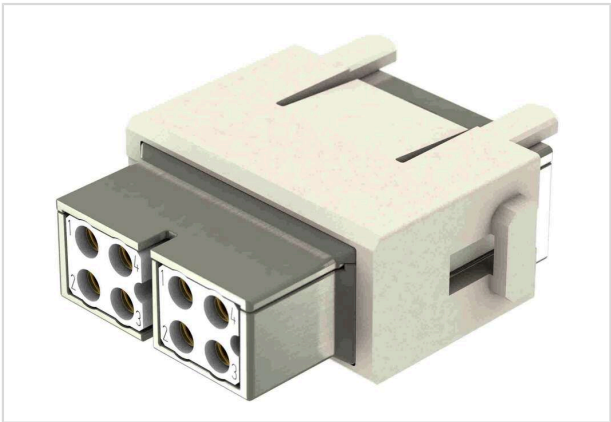


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 008 3142
Specification	Han Megabit Modul for PCB, GND, Female
HARTING eCatalogue	https://harting.com/09140083142

Identification

Category	Modules
Type of module	Han [®] Megabit module
Description of the module	Insert 2x 4 contacts

Version

Termination method	Fast termination
Gender	Female
Number of contacts	8
further contacts	+ shielding
Details	With additional shield connection to the hinged frame

Technical characteristics

Wire outer diameter	≤3.5 mm
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Transmission characteristics	Cat. 5 Class D up to 100 MHz
Data rate	100 Mbit/s
Contact resistance, shielding	≤100 mΩ
Limiting temperature	-40 ... +85 °C



Pushing Performance
Since 1945

Technical characteristics

Mating cycles	≥500
---------------	------

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (shielding)	Zinc die-cast, nickel-plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead
Fire protection on railway vehicles	EN 45545-2 (2020-08) + A1 (2023-10)
Requirement set with Hazard Levels	R22 (HL 1-3) R23 (HL 1-3)

Specifications and approvals

Specifications	IEC 60664-1
	IEC 61984
	EN 50467
	IEC 61373 Category 2

Commercial data

Packaging size	2
Net weight	37.05 g
Country of origin	Romania
European customs tariff number	85366990
GTIN	5713140187672
eCl@ss	27440218 Module for industrial connectors (data)
ETIM	EC000438



Pushing Performance
Since 1945

Commercial data

UNSPSC 24.0

39121552
