


UT 4 RD - Feed-through terminal block



3045127

<https://www.phoenixcontact.com/za/products/3045127>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 32 A, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.14 mm² - 6 mm², mounting type: NS 35/7,5, NS 35/15, color: red

Your advantages

- The large wiring space enables the connection of solid and stranded conductors without ferrules, even above the nominal cross section
- As well as saving space, the compact design enables user-friendly wiring in a small amount of space
- Optimum screwdriver guidance through closed screw shafts
- The cable entry funnel enables the use of conductors with ferrules and plastic collars within the nominal cross section

Commercial Data

| | |
|--------------------------------------|--------------------|
| Item number | 3045127 |
| Packing unit | 50 pc |
| Minimum order quantity | 1 pc |
| Sales Key | 018 |
| Product Key | BE1111 |
| Catalog Page | Page 27 (C-3-2013) |
| GTIN | 4017918975463 |
| Weight per Piece (including packing) | 9,424 g |
| Weight per Piece (excluding packing) | 9,3 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

UT 4 RD - Feed-through terminal block



3045127

<https://www.phoenixcontact.com/za/products/3045127>

Technical Data

Product properties

| | |
|-----------------------|-----------------------------|
| Product type | Feed-through terminal block |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 1.02 W |

Connection data

| | |
|---------------------------------|-------------------|
| Number of connections per level | 2 |
| Nominal cross section | 4 mm ² |

Level 1 above 1 below 1

| | |
|---|--|
| Screw thread | M3 |
| Tightening torque | 0.6 ... 0.8 Nm |
| Stripping length | 9 mm |
| Internal cylindrical gage | A4 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section rigid | 0.14 mm ² ... 6 mm ² |
| Cross section AWG | 26 ... 10 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 6 mm ² |
| Conductor cross section, flexible [AWG] | 26 ... 10 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 4 mm ² |
| 2 conductors with same cross section, solid | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 2.5 mm ² |
| Nominal current | 32 A (with 4 mm ² conductor cross section) |
| Maximum load current | 41 A (with 6 mm ² conductor cross section) |
| Nominal voltage | 1000 V |
| Note | Note: Product releases, connection cross sections and notes on connecting aluminum cables can be found in the download area. |
| Nominal cross section | 4 mm ² |

UT 4 RD - Feed-through terminal block



3045127

<https://www.phoenixcontact.com/za/products/3045127>

Ex data

Rated data (ATEX/IECEX)

| | |
|--|---|
| Identification | □ II 2 GD Ex eb IIC Gb |
| Operating temperature range | -60 °C ... 110 °C |
| Ex-certified accessories | 3047028 D-UT 2,5/10 3047167 ATP-UT 1205053 SZS 0,6X3,5 3022276 CLIPFIX 35-5 3022218 CLIPFIX 35 |
| List of bridges | Plug-in bridge / FBS 2-6 / 3030336 Plug-in bridge / FBS 3-6 / 3030242 Plug-in bridge / FBS 4-6 / 3030255 Plug-in bridge / FBS 5-6 / 3030349 Plug-in bridge / FBS 10-6 / 3030271 Plug-in bridge / FBS 20-6 / 3030365 Plug-in bridge / FBS 50-6 / 3032224 |
| Bridge data | 27 A / 4 mm ² |
| Ex temperature increase | 40 K (33.3 A / 4 mm ²) |
| Rated voltage | 690 V |
| for bridging with bridge | 690 V |
| - At bridging between non-adjacent terminal blocks | 352 V |
| - At bridging between non-adjacent terminal blocks via PE terminal block | 275 V |
| - At cut-to-length bridging with cover | 220 V |
| - At cut-to-length bridging with partition plate | 275 V |
| Rated insulation voltage | 630 V |
| output | (Permanent) |

Ex level General

| | |
|----------------------|---------|
| Rated current | 30 A |
| Maximum load current | 38 A |
| Contact resistance | 0.26 mΩ |

Ex connection data General

| | |
|--|--|
| Torque range | 0.6 Nm ... 0.8 Nm |
| Nominal cross section | 4 mm ² |
| Rated cross section AWG | 12 |
| Connection capacity rigid | 0.14 mm ² ... 6 mm ² |
| Connection capacity AWG | 26 ... 10 |
| Connection capacity flexible | 0.14 mm ² ... 4 mm ² |
| Connection capacity AWG | 26 ... 12 |
| 2 conductors with same cross section, solid | 0.14 mm ² ... 1.5 mm ² |
| 2 conductors with the same cross-section AWG rigid | 26 ... 16 |
| 2 conductors with same cross section, stranded | 0.14 mm ² ... 1.5 mm ² |

UT 4 RD - Feed-through terminal block



3045127

<https://www.phoenixcontact.com/za/products/3045127>

| | |
|---|-----------|
| 2 conductors with the same cross-section AWG flexible | 26 ... 16 |
|---|-----------|

Dimensions

| | |
|------------------|---------|
| Width | 6.2 mm |
| End cover width | 2.2 mm |
| Height NS 35/15 | 55 mm |
| Height NS 35/7,5 | 47.5 mm |
| Length | 47.7 mm |

Material specifications

| | |
|--|--------|
| Color | red |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 125 °C |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C () |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

UT 4 RD - Feed-through terminal block




3045127

<https://www.phoenixcontact.com/za/products/3045127>

Drawings

Circuit diagram

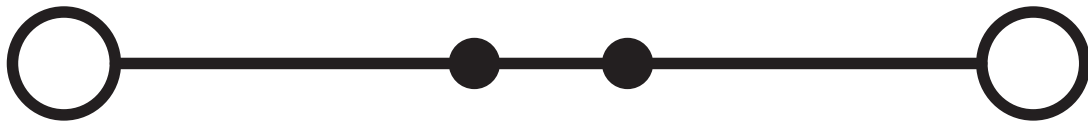


UT 4 RD - Feed-through terminal block




3045127


<https://www.phoenixcontact.com/za/products/3045127>

Approvals

|  CSA Approval ID: 13631 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group B | 600 V | 30 A | 26 - 10 | - |
| Use group C | 600 V | 30 A | 26 - 10 | - |

|  IECEE CB Scheme Approval ID: DE1-63061_M1 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| | 1000 V | 32 A | - | 0.2 - 4 |

|  cULus Recognized Approval ID: E60425 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group B | | | | |
| Factory wiring | 600 V | 40 A | 26 - 10 | - |
| | 600 V | 30 A | 26 - 10 | - |
| Multi-conductor connection | 600 V | 30 A | 26 - 14 | - |
| Use group C | | | | |
| Factory wiring | 600 V | 40 A | 26 - 10 | - |
| | 600 V | 30 A | 26 - 10 | - |
| Multi-conductor connection | 600 V | 30 A | 26 - 14 | - |

|  RS Approval ID: 22.44.01.00083.250 | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

|  VDE Zeichengenehmigung Approval ID: 40013658 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| | 1000 V | 32 A | - | 0.2 - 4 |


|  ATEX Approval ID: KEMA04ATEX2048U | | | | |
|---|--|--|--|--|
|---|--|--|--|--|


UT 4 RD - Feed-through terminal block





3045127


<https://www.phoenixcontact.com/za/products/3045127>

|  cUL Recognized Approval ID: E192998 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group B | | | | |
| | 600 V | 30 A | 26 - 10 | - |
| Use group C | | | | |
| | 600 V | 30 A | 26 - 10 | - |

|  EAC Ex Approval ID: RU C-DE.HA91.B.00066 | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

|  IECEx Approval ID: IECEx KEM 06.0027U | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  UL Recognized Approval ID: E192998 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group B | | | | |
| | 600 V | 30 A | 26 - 10 | - |
| Use group C | | | | |
| | 600 V | 30 A | 26 - 10 | - |

|  CCC Approval ID: 2020322313000622 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  NEPSI Approval ID: GYJ20.1194U | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

|  UKCA-EX Approval ID: DEKRA 21UKEX0304U | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

UT 4 RD - Feed-through terminal block



3045127

<https://www.phoenixcontact.com/za/products/3045127>

Classifications

ECLASS

ECLASS-11.0

27141120

ETIM

ETIM 8.0

EC000897

UNSPSC

UNSPSC 21.0

39121400

UT 4 RD - Feed-through terminal block



3045127

<https://www.phoenixcontact.com/za/products/3045127>

Environmental Product Compliance


| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>

Accessories

 Note: Applying some accessories below might limit this product.

FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/za/products/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 32 A

FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/za/products/3030242>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 32 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>




FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/za/products/3030255>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A


FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/za/products/3030349>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/za/products/1008238>



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 32 A


FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/za/products/3030271>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

UT 4 RD - Feed-through terminal block

3045127


<https://www.phoenixcontact.com/za/products/3045127>




FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/za/products/3030365>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 32 A


FBS 50-6 - Plug-in bridge

3032224

<https://www.phoenixcontact.com/za/products/3032224>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 32 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>


FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/za/products/3033715>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A


FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/za/products/3001594>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 24 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>




FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/za/products/3001595>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 24 A


FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/za/products/3001596>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 24 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/za/products/3033716>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 24 A


FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/za/products/3033812>



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>




FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/za/products/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 32 A


FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/za/products/3036945>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 32 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>




FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/za/products/3036958>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 32 A


FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/za/products/3036961>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 32 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/za/products/3032198>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue




 Max. current carrying capacity: 32 A

FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/za/products/3032208>

Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue



 Max. current carrying capacity: 32 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>




FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/za/products/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 32 A


RB ST 10-(2,5/4) - Reducing bridge

3030873

<https://www.phoenixcontact.com/za/products/3030873>



Reducing bridge, pitch: 10 mm, number of positions: 2, length: 36 mm, color: red

 Max. current carrying capacity: 35 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>




RB UT 10-(2,5/4) - Reducing bridge

3047060

<https://www.phoenixcontact.com/za/products/3047060>



Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 29 mm, color: red

 Max. current carrying capacity: 40 A


RB UT 35-(2,5/4) - Reducing bridge

3047277

<https://www.phoenixcontact.com/za/products/3047277>



Reducing bridge, pitch: 11 mm, number of positions: 2, color: red

 Max. current carrying capacity: 40 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>




RB UT 16-(2,5/4) - Reducing bridge

3047073

<https://www.phoenixcontact.com/za/products/3047073>



Reducing bridge, pitch: 11 mm, number of positions: 2, length: 31 mm, color: red

 Max. current carrying capacity: 40 A


RB UT 6-(2,5/4) - Reducing bridge

3047251

<https://www.phoenixcontact.com/za/products/3047251>



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 25 mm, color: red

 Max. current carrying capacity: 40 A

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>

D-UT 2,5/10 - End cover

3047028

<https://www.phoenixcontact.com/za/products/3047028>

End cover, length: 47 mm, width: 2.2 mm, height: 39.8 mm, color: gray



ATP-UT - Partition plate

3047167

<https://www.phoenixcontact.com/za/products/3047167>

Partition plate, length: 53.4 mm, width: 2.2 mm, height: 45.7 mm, color: gray



UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/za/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/za/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



WS UT 4 - Warning label

3047332

<https://www.phoenixcontact.com/za/products/3047332>

Warning sign for UT terminal blocks



SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/za/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/za/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/za/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/za/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/za/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/za/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/za/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/za/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/za/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/za/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/za/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/za/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/za/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/za/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/za/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/za/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/za/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/za/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/za/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/za/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

ZB 6:UNBEDRUCKT - Zack marker strip

1051003

<https://www.phoenixcontact.com/za/products/1051003>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



ZB 6 CUS - Zack marker strip

0824992

<https://www.phoenixcontact.com/za/products/0824992>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

<https://www.phoenixcontact.com/za/products/1051016>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>

ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

<https://www.phoenixcontact.com/za/products/1051029>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

<https://www.phoenixcontact.com/za/products/1051032>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>

ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

<https://www.phoenixcontact.com/za/products/1051414>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

ZB 6,LGS:U-N - Marker for terminal blocks

1051430

<https://www.phoenixcontact.com/za/products/1051430>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UT 4 RD - Feed-through terminal block



3045127

<https://www.phoenixcontact.com/za/products/3045127>

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/za/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

UC-TM 6 CUS - Marker for terminal blocks

0824589

<https://www.phoenixcontact.com/za/products/0824589>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/za/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

UCT-TM 6 CUS - Marker for terminal blocks

0829602

<https://www.phoenixcontact.com/za/products/0829602>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



MPS-MT - Test plugs

0201744

<https://www.phoenixcontact.com/za/products/0201744>



Test plugs, with solder connection up to 1 mm² conductor cross section, color: gray

MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/za/products/0201663>

Insulating sleeve, color: white



UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/za/products/0201676>

Insulating sleeve, color: red




MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/za/products/0201689>

Insulating sleeve, color: blue



UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/za/products/0201692>

Insulating sleeve, color: yellow



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/za/products/0201702>

Insulating sleeve, color: green



UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/za/products/0201728>

Insulating sleeve, color: gray



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/za/products/0201731>

Insulating sleeve, color: black



UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/za/products/3035975>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/za/products/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>

PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/za/products/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/za/products/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/za/products/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/za/products/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 4 RD - Feed-through terminal block



3045127

<https://www.phoenixcontact.com/za/products/3045127>

PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/za/products/3035982>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/za/products/3035979>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/za/products/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/za/products/3035983>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>



PS-6 - Test plugs

3030996

<https://www.phoenixcontact.com/za/products/3030996>



Test plugs, Modular test plug, color: red

PS-6/2,3MM RD - Test plugs

3038736

<https://www.phoenixcontact.com/za/products/3038736>



Test plugs, color: red

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>

CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/za/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/za/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

UT 4 RD - Feed-through terminal block

3045127

<https://www.phoenixcontact.com/za/products/3045127>




E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/za/products/0800886>

End clamp, width: 9.5 mm, color: gray



PAI-4-N GY - Test adapter

3032871

<https://www.phoenixcontact.com/za/products/3032871>

4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch



Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (Pty) Ltd.
36 Lyn Road P.O. Box 916 ZA-Ferndale 2160

+27/11/801-8200
info@phoenixcontact.co.za