

Data sheet Product LA V 14 100 24




Cooling aggregates>Cooling aggregates with axial fan
120 x 120 mm, with axial fan and air-flow chamber

Features

width:	120 mm
height:	120 mm
length:	100 mm
thermal resistance:	0.14 - 0.05 K/W
surface:	- aluminium natural/degreased/cutting edges not deburred (by the metre not degreased/cutting edges not deburred) - mounting area(s) milled flat
operating voltage of the fan motor:	24 V DC 230 V AC

Technical Drawing

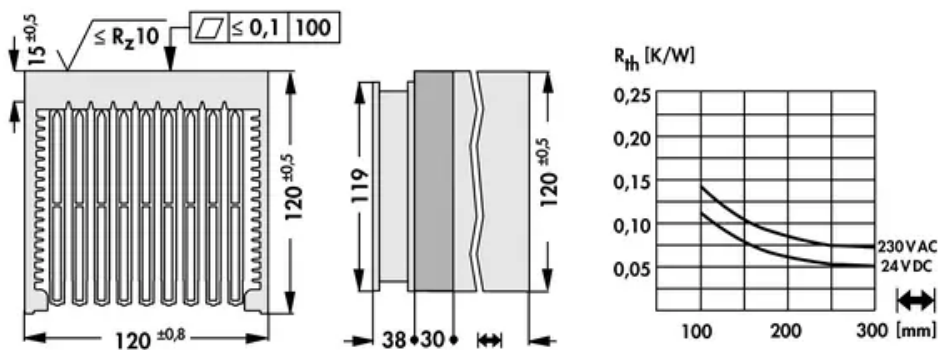

Fan

type:	ebmpapst 4656N
dimensions:	119x119x38 mm
tension:	230 V AC
power inout:	19 W
max. air volume:	160 m³/h
temperature range:	-40°C... +85°C
noise level:	47 dB(A)
speed:	2,650 min⁻¹
weight:	550 g
failure rate (L ₁₀):	L₁₀ > 37,500 h (40°C)
type:	ebmpapst 4184NXH
dimensions:	119x119x38 mm
tension:	24 V DC
power inout:	11 W
max. air volume:	237 m³/h
temperature range:	-30°C ... +70°C
noise level:	57 dB(A)
speed:	4,400 min⁻¹
weight:	390 g
failure rate (L ₁₀):	L₁₀ > 70,000 h (40°C)