



SPECIFICATION

MODULE NO.: WF43PTIBEDBTA#

General Specifications

Item	Dimension	Unit
Size	4.3	inch
Dot Matrix	480 x RGBx272(TFT)	dots
Module dimension	106.7 x 83.98 x 9.6	mm
Active area	95.04 x 53.856	mm
Dot pitch	0.066 x 0.198	mm
LCD type	TFT, Normally White, Transmissive	
View Direction	12 o'clock	
Gray Scale Inversion Direction	6 o'clock	
Backlight Type	LED, Normally White	
Controller IC	RA8875	
Interface	Digital 8080 family MPU	
With /Without TP	With RTP	
Surface	Anti-Glare	

*Color tone slight changed by temperature and driving voltage.

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Operating conditions: (CON3.Pin1=GND, Pin2=VDD)

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For LCM	VDD	—	3.0	3.3	3.6	V
Supply Current For LCM	IDD	—	—	65	100	mA


Backlight driving conditions (CON3.Pin33,34=VLED-, Pin35,36=VLED+)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operation Current For LED Driver	VLED+=3.3V	270	-	405	mA
Power Consumption	VLED+=3.3V	891	-	1337	mW
Supply Voltage For LED Driver	VLED+	3.3	-	5	V
LED Life Time		-	50,000	-	Hr

Interface

Pin	Symbol	Function
1	GND	System ground
2	VDD	Power Supply : +3.3V
3	BL_E	Backlight control signal , H: On \ L: Off
4	RS	Data/Command select
5	WR	Write strobe signal
6	RD	Read strobe signal
7~22	DB0~DB15	Data bus
23	WAIT	Wait Signal Output(H:active)
24	NC	No connect
25	CS	Chip select
26	RST	Hardware reset
27	DIP ON	Display control H: On \ L:Off
28~32	NC	No connect
33~34	VLED-	Power for LED backlight cathode
35~36	VLED+	Power for LED backlight anode

Contour Drawing

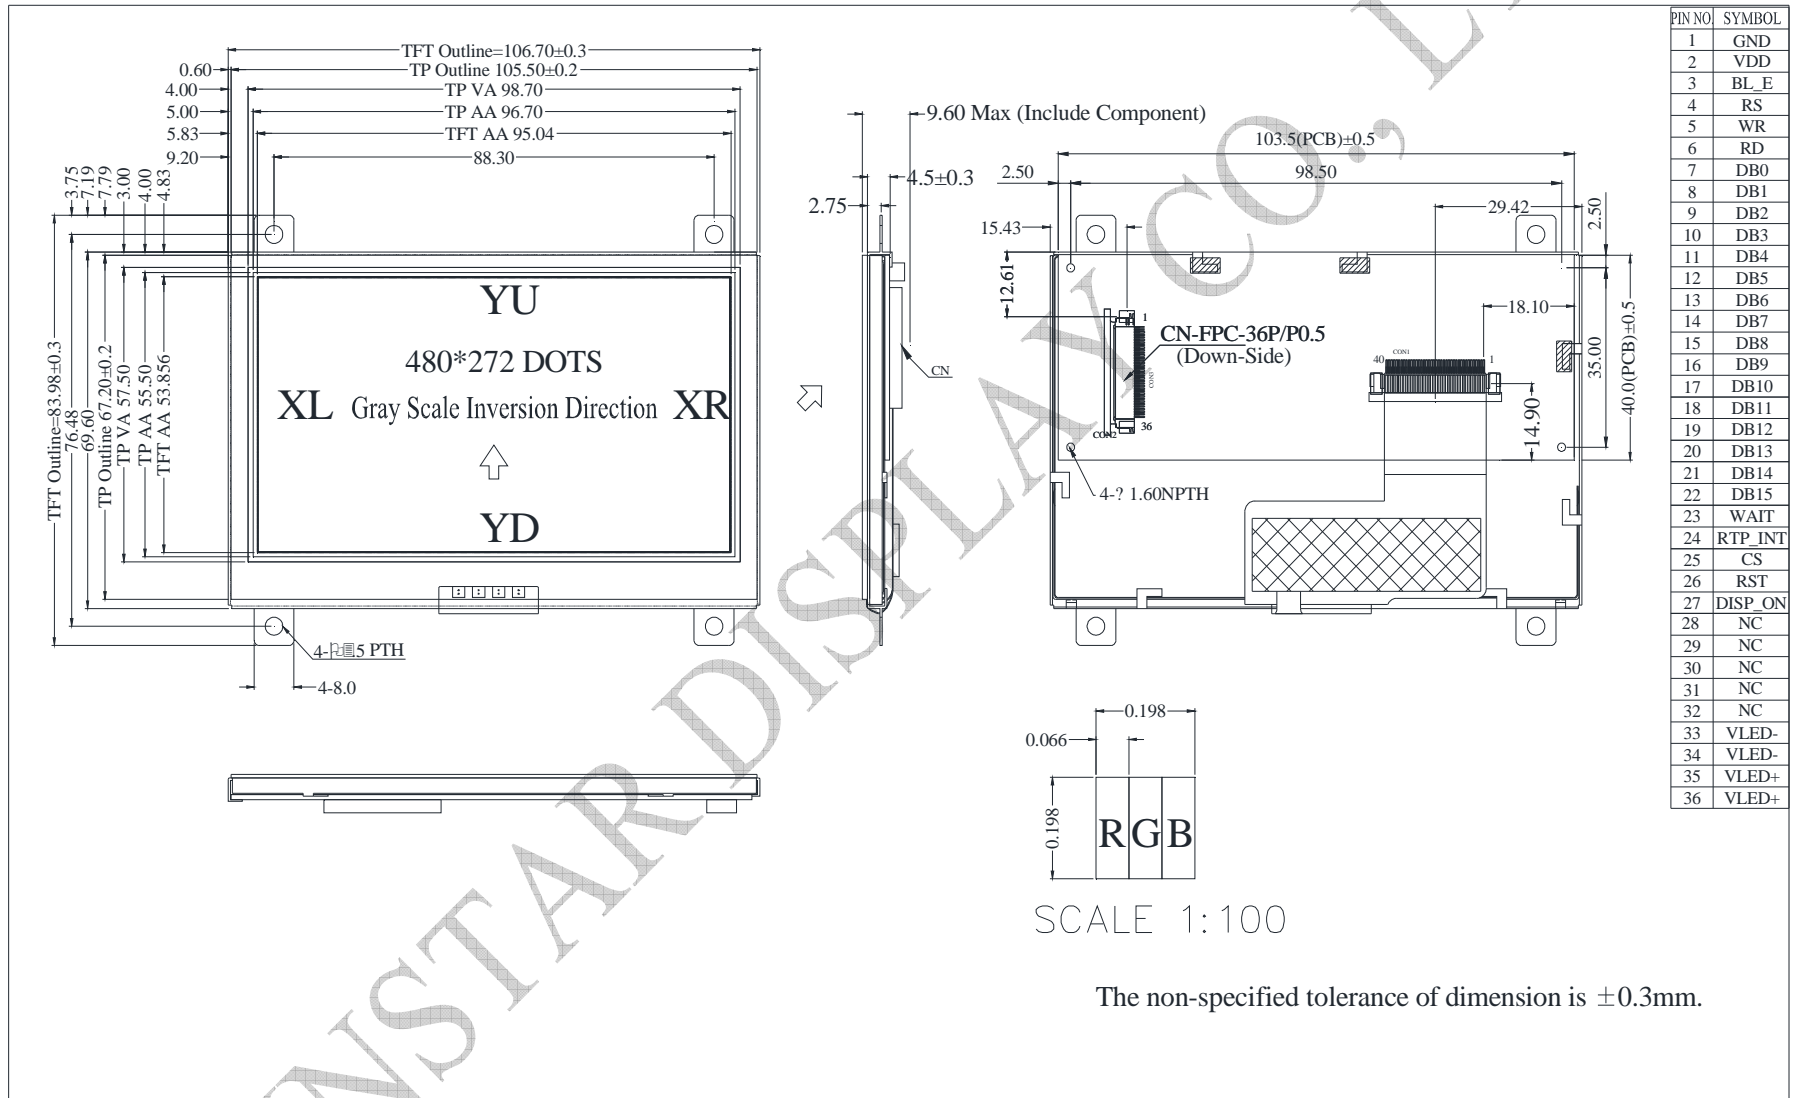

The non-specified tolerance of dimension is ±0.3mm.