


AC/DC Industrial Power Supply

TIB 480-EX Series, 480 Watt

- UL Hazloc Class I, division 2 approval and ATEX certification
- SEMI F47 compliant for voltage sag immunity
- Rugged metal case with optional side-mounting
- Back power immunity
- 150% peak current for 4 s
- Operating Temp -40°C to +70°C (full load up to 60°C)
- Adjustable output voltage
- High Reliability: MTBF 1 mill hrs per IEC 61709
- Short circuit and overload protection
- 5-year product warranty

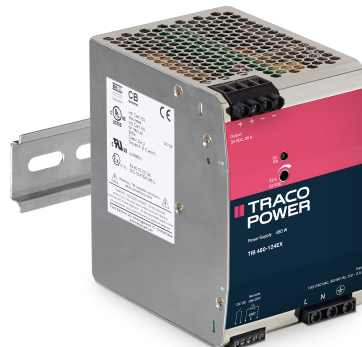

The TIB 480-EX family of next generation of 480 Watt din rail power supplies feature high efficiency operation of up to 95% enabling a slim design with alternative side-mounting for flat panels (DC OK Indicator on both front and side panel). These products certified to UL Hazloc Class 1 / Div 2, and ATEX (EN 60079-0, EN 60079-7, EN 60079-15) for operation in hazardous locations. These convection cooled power supplies have a -40°C to +60°C full load operating temperature range. 150% peak power for up to 4 seconds which is ideal for stepper motors, solenoids or actuators. The TIB 080-EX series has an important Back Power Immunity feature that helps protect against shut-down or malfunction with loads such as inductors and decelerating motors that can feed voltage back to the power supply. Outputs are radio-interference-suppressed to impede radiation at long output lines which reduces the common mode current to within limits of telecommunication ports. The series operate with a high power factor of up to 99% which also minimizes inrush current. Additional qualifications include IEC/EN/UL 60950-1, UL 508 and CB Report with EMC compliance to IEC/EN 61000-6-2 and IEC/EN 61000-6-3.

Models

Order Code	Output Power max.	Output Voltage nom. (adjustable)	Output Current max.	Output Current peak	Efficiency typ.
TIB 480-124EX	480 W	24 VDC (23.5 - 28.0 VDC)	20'000 mA	30'000 mA	95 %
TIB 480-148EX		48 VDC (47.0 - 56.0 VDC)	10'000 mA	15'000 mA	95 %

Options

TIB-RMK01	- Optional Ruggedized DIN-Rail Mounting Clip for EN 61373: www.tracopower.com/products/tib-rmk01.pdf
-----------	---

Input Specifications

Input Voltage	85 - 264 VAC (Full Range)
Input Frequency	45 - 65 Hz
Power Consumption	- At no load 3'800 mW typ.
Input Inrush Current	- At 230 VAC 30 A max. - At 115 VAC 15 A max.
Power Factor	- At 230 VAC 0.97 min. (Active Power Factor Correction) - At 115 VAC 0.99 min. (Active Power Factor Correction)
Recommended Input Fuse	(The need of an external fuse has to be assessed in the final application.)

Output Specifications

Output Voltage Adjustment	24 VDC model: 23.5 - 28.0 VDC 48 VDC model: 47.0 - 56.0 VDC (By trim potentiometer) Output power must not exceed rated power!
Regulation	- Input Variation (Vmin - Vmax) 0.1% max. - Load Variation (10 - 90%) 0.5% max.
Output Current peak	Peak Operation Power: 150% max. Peak Operation Time: 4 s max. (auto switch off) Off Time: 10 s typ. During peak operation, the unit continuously switches off the output voltage after 4 s and restarts after approx. 10 s.
Ripple and Noise (20 MHz Bandwidth)	24 VDC model: 100 mVp-p max. 48 VDC model: 200 mVp-p max.
Capacitive Load	Infinite
Minimum Load	Not required
Temperature Coefficient	±0.02 %/K max.
Hold-up Time	- At 230 VAC 20 ms min. - At 115 VAC 20 ms min.
Start-up Time	- At 230 VAC 2'000 ms max. - At 115 VAC 2'000 ms max.
Short Circuit Protection	Continuous, Automatic recovery
Overload Protection	Constant Current Mode Switch off after 4 s delay, automatic restart
Output Current Limitation	155% min. of Iout max.
Overvoltage Protection	117 - 146% of Vout nom. (depending on model) 32 - 35 VDC (24 VDC model) 56 - 60 VDC (48 VDC model) (In case of an internal error a second voltage regulation loop keeps the output voltage at a save level, the power supply turns off and tries to restart after 10 s.)
Transient Response	- Peak Variation 600 mV max. (10% to 90% Load Step) - Response Time 5000 µs typ. (10% to 90% Load Step)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Safety Specifications

Safety Standards	<ul style="list-style-type: none"> - IT / Multimedia Equipment - Industrial Control Equipment - ATEX - HazLoc - Certification Documents 	CSA-C22.2, No 60950-1 EN 60950-1 IEC 60950-1 UL 60950-1 UL 508 EN 60079-0 EN 60079-15 EN 60079-7 EX II3G Ex nA nC IIC T4 GC UL 121201 Class I; Div 2; Groups A,B,C,D; T4 www.tracopower.com/overview/tib480-ex
Protection Class		Class I (Prepared): Connection to PE
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI Emissions	<ul style="list-style-type: none"> - Conducted Emissions - Radiated Emissions - Harmonic Current Emissions 	EN 61000-6-3 (Generic Residential) EN 61204-3 (Low Voltage Power Supplies) EN 50121-3-2 (EMC for Rolling Stock) EN 50121-4 (Railway Application Signalling) EN 55011 class B (internal filter) EN 55032 class B (internal filter) EN 55011 class B (internal filter) EN 55032 class B (internal filter) EN 61000-3-2, class A
EMS Immunity	<ul style="list-style-type: none"> - Electrostatic Discharge - RF Electromagnetic Field - EFT (Burst) / Surge - Conducted RF Disturbances - PF Magnetic Field - Voltage Dips & Interruptions - Voltage Sag Immunity 	EN 50121-3-2 (EMC for Rolling Stock) EN 50121-4 (Railway Application Signalling) EN 61000-6-2 (Generic Industrial) EN 61204-3 (Low Voltage Power Supplies) Air: EN 61000-4-2, ± 8 kV, perf. criteria A Contact: EN 61000-4-2, ± 4 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria B L to L: EN 61000-4-5, ± 1 kV, perf. criteria B L to PE: EN 61000-4-5, ± 2 kV, perf. criteria B EN 61000-4-6, 10 Vrms, perf. criteria A Continuous: EN 61000-4-8, 30 A/m, perf. criteria A 230 VAC / 50 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria C 60%, 10 periods, perf. criteria C >95%, 1 period, perf. criteria B >95%, 5 periods, perf. criteria C 20%, 250 periods, perf. criteria C 115 VAC / 60 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria C 60%, 10 periods, perf. criteria C >95%, 1 period, perf. criteria B >95%, 5 periods, perf. criteria C 20%, 250 periods, perf. criteria C SEMI F47, criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +70°C

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Power Derating	- High Temperature	2 %/K above 60°C (at standard operation) 3 %/K above 60°C (at peak power mode)
	- Low Input Voltage	3 %/V below 90 VAC (at standard operation) 1.5 %/V below 100 VAC (at peak power mode)
Over Temperature Protection Switch Off	- Protection Mode	Latch off
Cooling System		Natural convection (20 LFM)
Remote Control	- Refer to Application Note	www.tracopower.com/overview/tib480-ex (The unit can be controlled by external relay contact or open collector signal.)
Altitude During Operation		2'000 m max.
Switching Frequency		70 - 90 kHz (PWM)
Insulation System		Reinforced Insulation
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC
	- Input to Case or PE, 60 s	1'500 VDC
	- Output to Case or PE, 60 s	750 VDC
Creepage	- Input to Output	8 mm min.
	- Input to Case or PE	4 mm min.
	- Output to Case or PE	1.5 mm min.
Clearance	- Input to Output	8 mm min.
	- Input to Case or PE	4 mm min.
	- Output to Case or PE	1.5 mm min.
Leakage Current	- Earth Leakage Current	3500 µA max.
	- Touch Current	880 µA max.
Reliability	- Calculated MTBF	1'000'000 h (IEC 61709)
Environment	- Vibration	EN 61373 IEC 60068-2-6 2 g, 3 axis, sine sweep, 10-55 Hz, 11 oct/min (Compliance to EN 61373 only with optional DIN-Rail Clip TIB-RMK01)
	- Mechanical Shock	EN 61373 IEC 60068-2-27 25 g, 3 axis, half sine, 11 ms (Compliance to EN 61373 only with optional DIN-Rail Clip TIB-RMK01)
Housing Material		Aluminum (Chassis) Stainless Steel (Cover)
Connection Type		Screw Terminal
Mounting	- DIN Rail	For DIN-rails as per EN 50022-35x15/7.5
Weight		1018 g
Thermal Impedance		0.6 K/W
Power Back Immunity	24 VDC model:	35 V max.
	48 VDC model:	60 V max. (When external voltage is supplied above set output voltage and below OVP threshold, the power supply will function normally without switch off or destruction, even if external voltage is applied continuously.)
Power OK Signal	- Trigger Threshold	24 VDC model: OK: 22.5 VDC, Off: 21.5 VDC 48 VDC model: OK: 45 VDC, Off: 43 VDC
	- Power OK - Power Off - Pin Specifications	Relay contact closed Relay contact open 30 VDC / 1 A max.
Status Indicator		Also indicated by green LEDs: front and side
Environmental Compliance	- Reach	www.tracopower.com/info/reach-declaration.pdf
	- RoHS	www.tracopower.com/info/rohs-declaration.pdf


All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Supporting Documents


Overview Link (for additional Documents)

www.tracopower.com/overview/tib480-ex

Blockdiagram

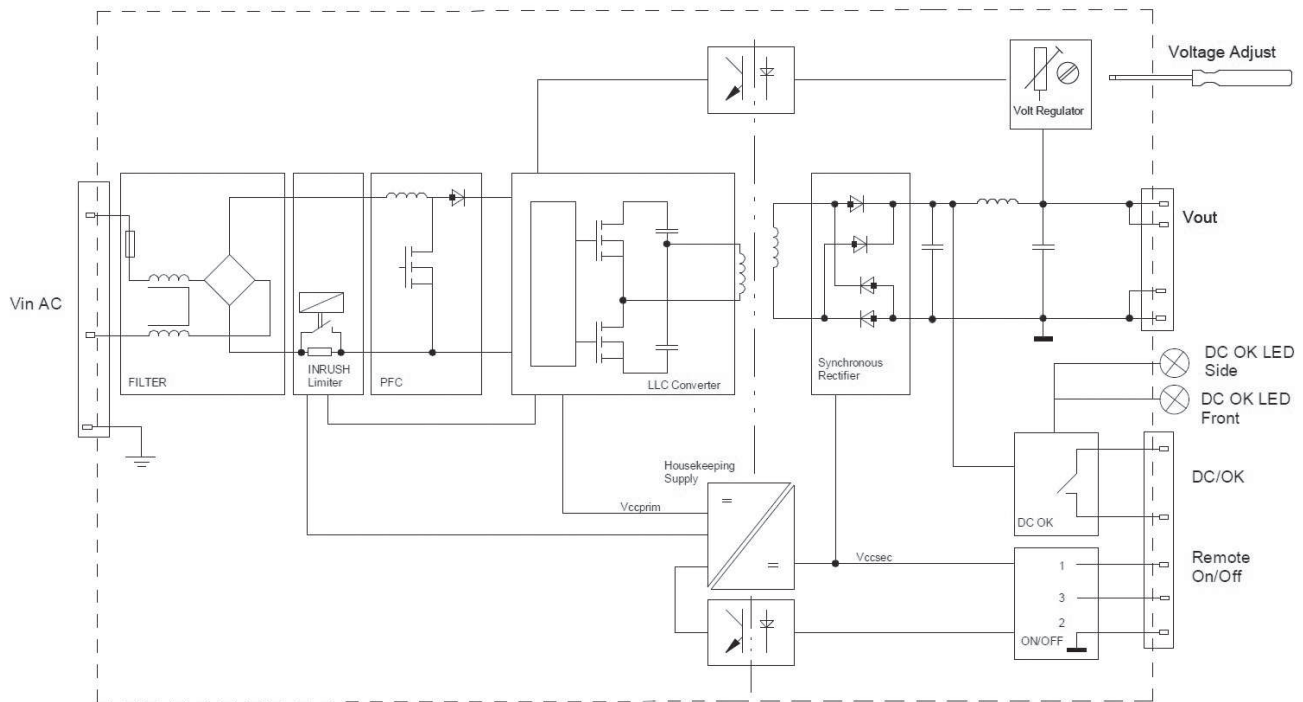

Outline Dimensions

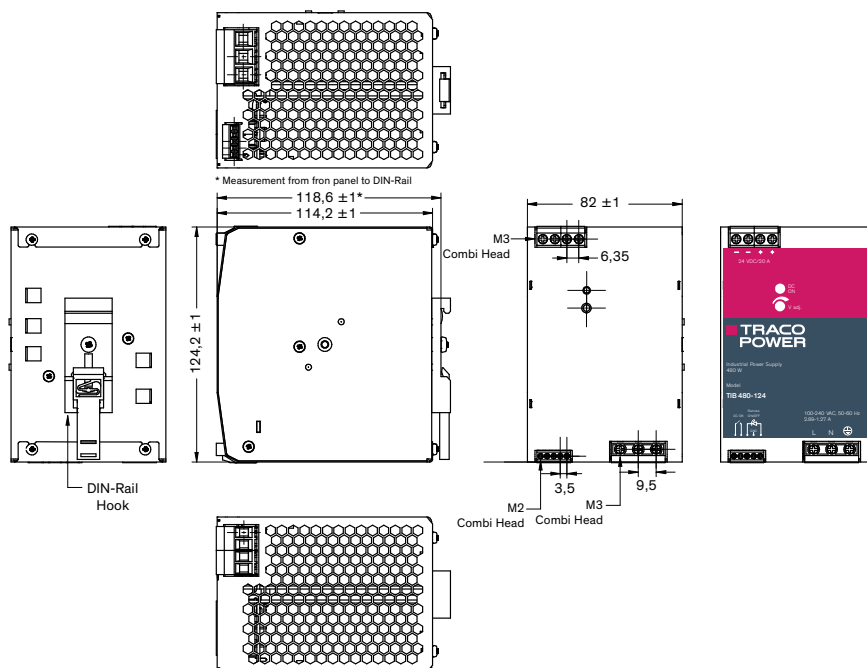

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Alternative side mounting

