

		See below: Approvals and Co	ompliances		
Description - Line filter in standard and medical version - 1-stage - standard attenuation		Characteristics - Cost-saving plastic housing Designed for standard applications - Protection against interference voltage from the mains Possible interferences generated in the equipment are strongly attenu- ated - For standard applications - Suitable for use in equipment according to IEC/UL 62368-1			
		Other versions on request - Version with wire connection - Medical Version (M80) References Alternative: Standard version			
Technical Data					
Ratings IEC Ratings UL/CSA	0.6 - 6A @ Ta 40 °C / 250 VAC; 50 Hz 0.6 - 6A @ Ta 40 °C / 125 VAC; 60 Hz	Line Filter	Standard and Medical Version, IEC 60939, UL 1283, CSA C22.2 no. 8		
Leakage Current	standard < 0.25 mA (250 V / 60 Hz) medical < 5 µA (250 V / 60 Hz)	MTBF	Technical Details > 200'000h acc. to MIL-HB-217 F		
Dielectric Strength	 > 1.7kVDC between L-N > 2.7kVDC between L/N-PE Test voltage (2 sec) 				
Allowable Operation Tempe- rature	-25 °C to 85 °C				
Climatic Category	25/085/21 acc. to IEC 60068-1				
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140				
-					

Approvals and Compliances

Terminal

Material

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

For PCB mounting , tin-plated Thermoplastic, black, UL 94V-0

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

FPP-01

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: FPP2

Approval Logo	Certificates	Certification Body	Description
10	VDE Approvals	VDE	Certificate Number: 40004673
c FL [®] us	UL Approvals	UL	UR File Number: E72928

Product standards

Product standards that are referenced

Organization	Design	Standard	Description				
IEC	Designed according to	IEC 60939	Passive filters for suppressing electromagnetic interference				
(h)	Designed according to	UL 1283	Electromagnetic interference filters				
CSA Group	Designed according to	CSA C22.2 no. 8	Electromagnetic interference (EMI) filters				

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
IEC	Designed for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements
IEC	Designed for applications acc.	IEC 60601-1	Medical electrical equipment - Part 1: General requirements for basic safety and essential performance

Compliances


The product complies with following Guide Lines


Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.
Ť	Medical Equipment	SCHURTER AG	Suitable for use in medical equipment according to IEC/UL 60601-1 (1 M00P, 1 M0PP)

Dimension [mm]


Case 13P



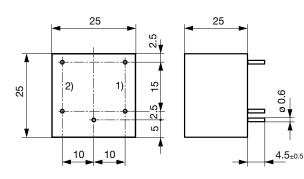

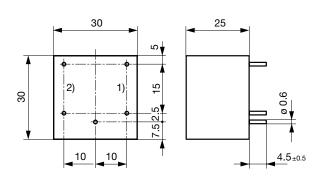


Case 24P

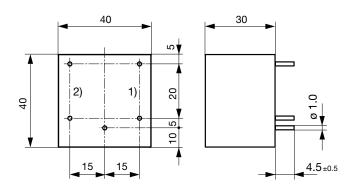

1) Line 2) Load


Diagrams

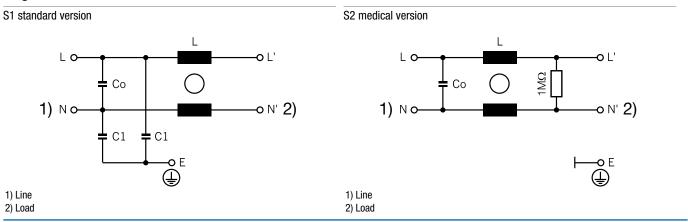

FPP-01

Attenuation Loss

- - - - 50 Ω differential mode _____ 50 Ω common mode

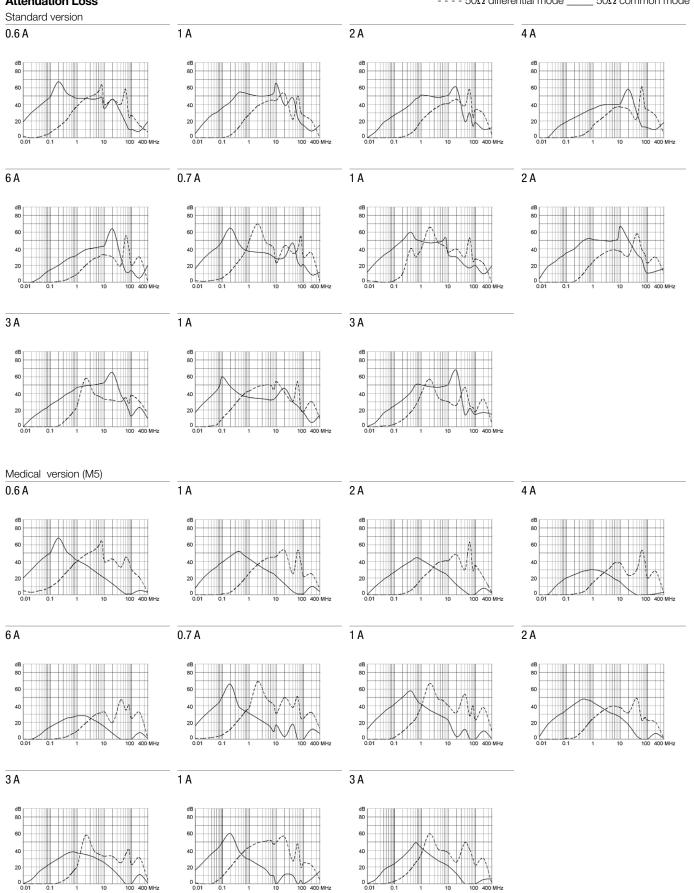

FPP-01

All Variants

Rated Current [A]	Filter-Type	L [mH]	Co / C2 (X2) [μF]	C1 (Y2) [nF]	Diagram	Weight [g]	Housing	Order Number
0.6	Standard version	2 x 40	0.015	2.2	S1	27 g	13P	5500.2000
1	Standard version	2 x 10	0.015	2.2	S1	27 g	13P	5500.2001
2	Standard version	2 x 4	0.015	2.2	S1	27 g	13P	5500.2002
4	Standard version	2 x 1.5	0.015	2.2	S1	27 g	13P	5500.2003
6	Standard version	2 x 0.8	0.015	2.2	S1	35 g	13P	5500.2004
0.7	Standard version	2 x 40	0.015	2.2	S1	32 g	18P	5500.2005
1	Standard version	2 x 20	0.022	2.2	S1	32 g	18P	5500.2006
2	Standard version	2 x 6	0.022	2.2	S1	32 g	18P	5500.2007
3	Standard version	2 x 3	0.022	2.2	S1	32 g	18P	5500.2008
1	Standard version	2 x 30	0.047	2.2	S1	78 g	24P	5500.2009
3	Standard version	2 x 4	0.047	2.2	S1	78 g	24P	5500.2010
0.6	Medical Version (M5)	2 x 40	0.015	-	S2	35 g	13P	5500.2116
1	Medical Version (M5)	2 x 10	0.015	-	S2	35 g	13P	5500.2117
2	Medical Version (M5)	2 x 4	0.015	-	S2	25.5 g	13P	5500.2118
4	Medical Version (M5)	2 x 1.5	0.015	-	S2	35 g	13P	5500.2119
6	Medical Version (M5)	2 x 0.8	0.015	-	S2	35 g	13P	5500.2120
0.7	Medical Version (M5)	2 x 40	0.015	-	S2	45 g	18P	5500.2121
1	Medical Version (M5)	2 x 20	0.022	-	S2	45 g	18P	5500.2122
2	Medical Version (M5)	2 x 6	0.022	-	S2	45 g	18P	5500.2123
3	Medical Version (M5)	2 x 3	0.022	-	S2	45 g	18P	5500.2124
1	Medical Version (M5)	2 x 30	0.047	-	S2	78 g	24P	5500.2125
3	Medical Version (M5)	2 x 4	0.047	-	S2	78 g	24P	5500.2126

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit

50 Pcs